

User Manual

IP622

V1.3

Revision Record:

Version	Date	Author	Firmware Version	Applicability
V1.0	2011-05-05	Anne	V1.2.0	
V1.1	2011-05-20	Anne	V1.2.1	
V1.2	2012-12-12	Maylin	V2.0	
V1.3	2013-06-06	Maylin	V2.0	Update the functions based on the new firmware (V2.0(201304221158))

Table of Contents

1	Introduction.....	1
1.1	Thanks for Purchasing IP622.....	1
1.2	Package Contents.....	1
2	Installing.....	2
2.1	Assembling the Phone and Connecting to the Network.....	2
2.2	Mounting the Phone to the Wall.....	2
2.3	Turning on the Phone.....	2
3	Get Familiar with IP622.....	4
3.1	Front Panel.....	5
3.2	Rear Panel.....	8
3.3	LEDs Indicator.....	8
3.4	Get Familiar with LCD.....	9
4	Menu.....	10
4.1	Items.....	10
4.2	How to configuration from Menu.....	12
5	Using Basic Phone Function.....	14
5.1	Using the Handset/ Speakerphone/ Headset.....	14
5.1.1	Using the Handset.....	14
5.1.2	Using the Speakerphone.....	14
5.1.3	Using the Headset.....	14
5.2	Making Telephone Call.....	14
5.2.1	Place a Call.....	14
5.2.2	Using Redial Button.....	14
5.2.3	Dialing from Phonebook.....	15
5.2.4	Dialing from Call History.....	15
5.2.5	Using Speed Dial.....	15
5.2.6	Using Dial Plan.....	16
5.2.7	Using Hot Line.....	16
5.2.8	Answering a Telephone Call.....	16
5.3	Adjusting Call Volume.....	17
5.4	Black List.....	17
5.5	Muting a Call.....	18
5.6	Placing a Call on Hold.....	18
5.7	Three Way Conference Calls.....	18
5.8	Attended Transfer.....	19
5.9	Unattended Transfer.....	19
5.10	Forwarding Calls.....	19
5.11	Call Waiting.....	20
5.12	Ending a Call.....	20
5.13	Viewing and Returning Missed Calls.....	21
5.14	Text Message.....	22
5.14.1	Sending Message.....	22
5.14.2	Reading Message.....	22
5.15	DND (Do Not Disturb).....	23
6	Using Advanced Phone Functions.....	24
6.1	Speed Dial.....	24
6.2	BLF (Busy Lamp Field).....	24
6.3	Shortcut Key.....	25
6.4	Pickup.....	26
6.5	Call Park.....	26
6.6	MSG.....	28
6.6.1	Enable and configuration MSG.....	28
6.6.2	Using MSG.....	29
6.7	Changing the LCD Screen Contrast.....	29
6.8	Changing Your Ring Tone.....	29

6.9 Setting Your Phone's Date and Time.....	29
6.10 Rebooting Your Phone.....	30
6.11 Factory default.....	30
7 CONFIGURATION.....	32
7.1 Web-based Configuration.....	32
7.2 Login.....	32
7.3 Webpage.....	33
7.4 Status.....	36
7.4.1 Basic.....	36
7.4.2 Syslog.....	37
7.5 SIP Account.....	38
7.5.1 SIP Settings.....	38
7.5.1.1 SIP Parameters.....	38
7.5.1.2 NAT Traversal.....	38
7.5.2 Line1.....	38
7.5.2.1 Basic.....	39
7.5.2.2 Audio Configuration.....	39
7.5.2.3 Supplementary Service Subscription.....	40
7.5.2.4 Advanced.....	40
7.5.3 Line2.....	41
7.5.4 VoIP QoS.....	41
7.6 Network.....	42
7.6.1 Basic.....	42
7.6.1.1 Internet Port (WAN).....	42
7.6.1.2 PC Port (LAN).....	44
7.6.2 MAC Address Clone.....	45
7.6.3 VPN.....	45
7.6.4 DMZ.....	46
7.6.5 DDNS.....	46
7.6.6 Multi WAN.....	46
7.7 Phone.....	47
7.7.1 Preference.....	47
7.7.1.1 Preference.....	47
7.7.1.2 Regional.....	48
7.7.1.3 Call Forward.....	48
7.7.1.4 Miscellaneous.....	49
7.7.2 Multi-Functional Key.....	49
7.7.3 Dial Plan.....	52
7.7.3.1 Parameters and Settings.....	52
7.7.3.2 Dial Plan Syntactic.....	54
7.7.3.3 Example.....	55
7.7.4 Phone Book.....	56
7.7.4.1 Upload &&Download Phonebook or Blacklist.....	56
7.7.4.2 Phonebook.....	56
7.7.4.3 Black List.....	58
7.7.5 Call Log.....	58
7.7.5.1 Redial List.....	59
7.7.5.2 Answered Calls.....	59
7.7.5.3 Missed Call.....	60
7.8 Administration.....	60
7.8.1 Management.....	60
7.8.1.1 File Upload&&Download.....	60
7.8.1.2 Administrator Settings.....	61
7.8.1.3 Time/Date.....	61
7.8.1.4 System Log Setting.....	62
7.8.1.5 Packet Trace.....	62
7.8.1.6 Factory Defaults.....	63

7.8.2 Firmware Upgrade..... 63

7.8.3 Provision..... 63

7.8.4 SNMP..... 64

7.8.5 TR069..... 65

8 Trouble Shooting..... 66

8.1 No Operation after Power On..... 66

8.2 Long Time Stop at “Initializing Network” 66

8.3 No Dial Tone..... 66

8.4 Can not Make a Call..... 66

8.5 Can not Receive Any Phone Call..... 66

8.6 No Voice during an Active Call..... 67

8.7 Can not connect to the configuration Website..... 67

8.8 Forget the Password..... 67

9 Contact ways..... 69

1 Introduction

1.1 Thanks for Purchasing IP622

Thank you for purchasing IP622. The IP622 which has 2 lines is a full-featured VoIP (Voice over Internet Protocol) phone that provides voice communication over an IP network.

This phone functions not only much like a traditional phone, allowing to place and receive calls and enjoy other features that traditional phone has, but also it own many data services which you could not expect from traditional telephone.

The IP622 provides **Power over Ethernet (PoE)** and two Ethernet ports for connecting another device to the local area network.

This guide will help you easily use the various features and services available on your phone.

1.2 Package Contents

Your package includes the following:

- ◆ One IP622 (with PoE) IP Phone Unit
- ◆ Handset and handset cord
- ◆ One universal power adapter
- ◆ One Ethernet cable
- ◆ Wall-mounting screw pack

2 Installing

2.1 Assembling the Phone and Connecting to the Network

- 1) Plug one end of the coiled phone cord into the left side of the phone base.
- 2) Plug the other end of the handset cord into the jack at the bottom of the handset.
- 3) If you are using an external power source, push the power cord into the power supply, and plug the power supply into the phone base unit.

Note: Use only the power supply that came with the phone.

- 4) Plug the Ethernet cable into **Internet port** in the rear side of the base station. Plug the other end of the Ethernet cable into your already prepared network connection.

2.2 Mounting the Phone to the Wall

- 1) Complete the assembly instructions.
- 2) Attach two appropriate screws to the wall. Leave 1/4 distance from the wall. This allows you to slide the mounting brackets on to the screws.

Push down slightly to lock the phone in place.

2.3 Turning on the Phone

This section assumes that the correct connections have been made.

- 1) Check whether the Internet port is well connected.
- 2) Plug the AC power adapter into the electrical outlet.

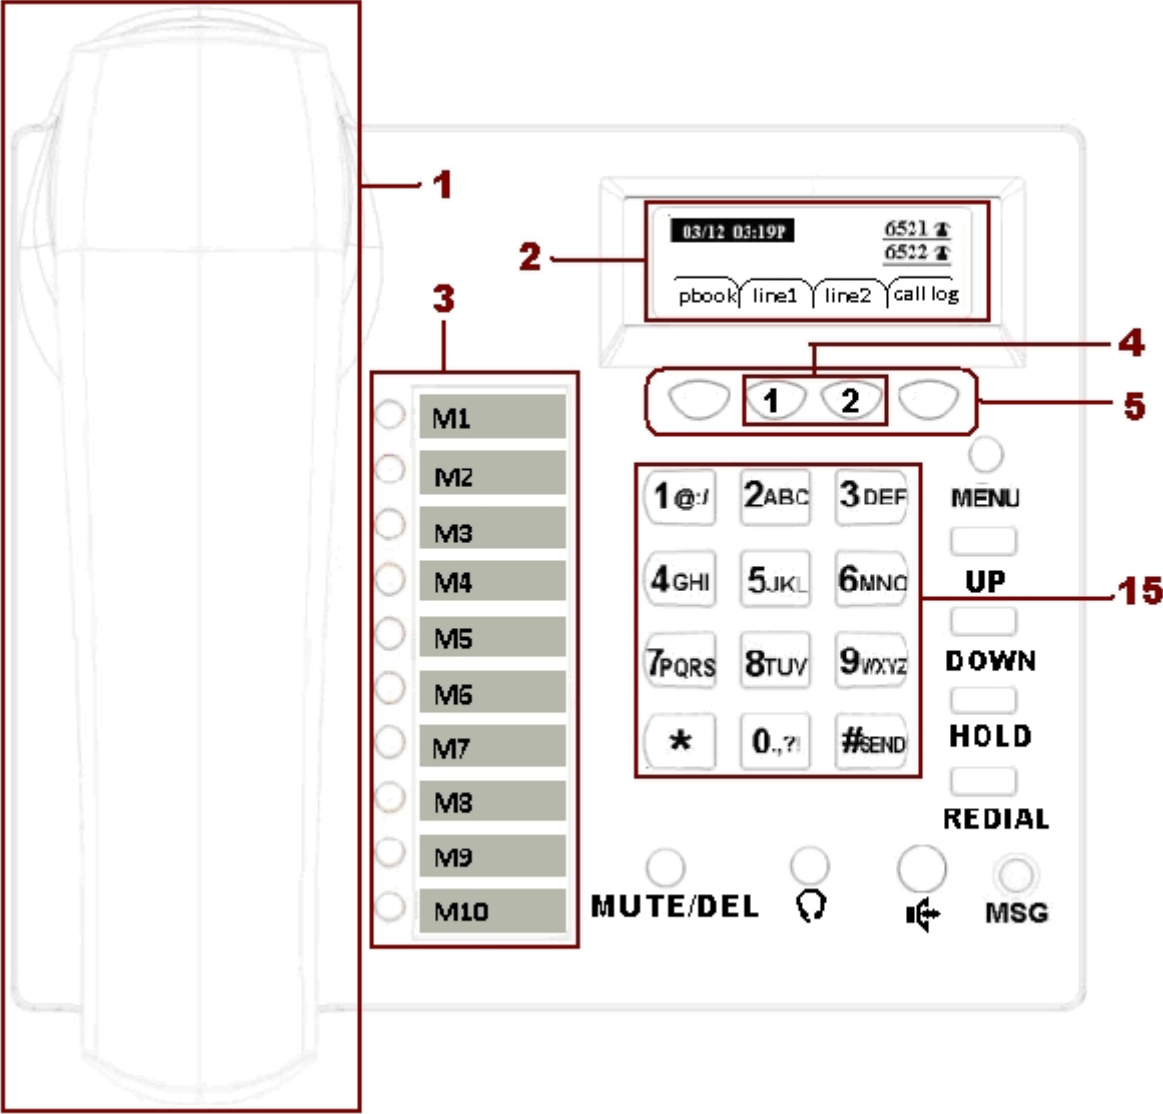
Note: Use only the adapter that came with the phone.

- 3) The LCD will firstly display “**Welcome**” and all of the lights on the phone will flash.
- 4) Next, the LCD display “**Initializing Network**”.
- 5) After the sequence, the phone will display date & time, lines status for the phone, and IP622 is started normally.

Notice: If the phone does not provide this screen, re-confirm installation and connections. If these are incorrect, try unplugging the phone and plugging it back in again. If you still don't see the display, then contact your Phone Administrator or service provider.

3 Get Familiar with IP622

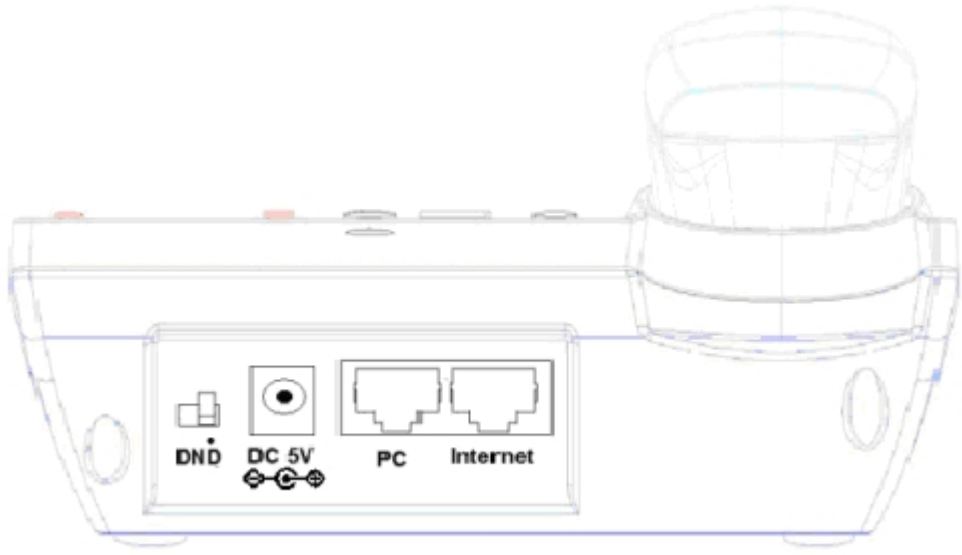
3.1 Front Panel

Front Panel		No.	Part Name	Description of function
		1	Handset top cradle	For the placement of handset (Receiver end)
			Hook switch	For hang-up and hang-off of handset
			Cradle latch	To prevent the handset from dropping when it is wall-mounted.
			Handset cradle bottom	For the placement of handset (Transmitter end)
			Handset cord port	RJ-11 jack on the left side of the IP phone
			Headset wire port	RJ-11 jack on the bottom of the handset
		2	LCD screen	The LCD screen is for displaying your settings, such as phone number, line status and so on.
		3	Multi-Functional Key	These keys can be used as speed dial, BLF, shortcut key, pick up and call park.
		4	Line Keys	In standby: These keys are used as line keys; you can press the line button to select the corresponding line, and then user can make call or do other functions. The LEDs under the keys used to display the status of each extension, please refer to 3.3 LCD indicator
		15	UP key	



















Picture 1










	5	Soft keys	These keys are used as soft keys. These can be used for item selection or control on the LCD screen. The softkey' function depends on their corresponding content displayed on the LCD at that time.
	6	Menu	Press it to access to menu items: such as phonebook, multi-functional key, and call history and so on.
	7	UP	To scroll up or turn up the volume
	8	DOWN	To scroll down or turn down the volume
	9	Hold	The Hold key is used to hold the current call, press it again to release the hold function.
	10	Redial	The Redial key is used to redial the last dialed number automatically.
	11	Mute/Del	✧ During an active call, press it to mute the current call. ✧ When input text, press it to delete a digit or number.
	12	Headset	Press it to use headset.
	13	Handsfree	Press it to use Handsfree
	14	MSG	✧ The key can be used for voicemail selection, press it to access voicemail (must be set up by your phone administrator) ✧ The LED is to indicate voicemail status. Please refer to 3.3 LCD indicator
	15	Numeric Keypad	Enters numeric digits for initiating a call or for entering configuration information.

3.2 Rear Panel

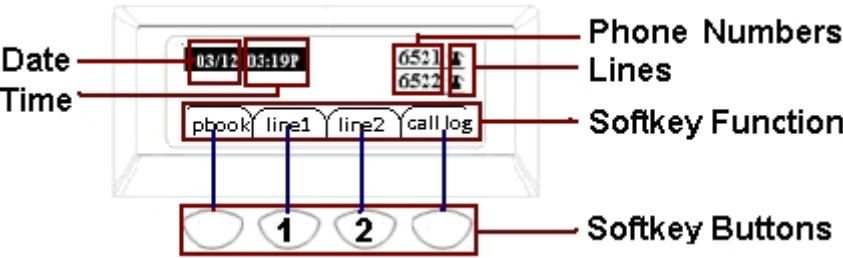


Rear Panel	Part Name	Description of function
	Headset	Headset console, connect to headset(This is on the right side of the phone.)
	DND Switch	The Switch is used to turn on or turn off DND. Under the character DND is a dot. When the switch near the dot, DND is on, otherwise DND is off. Taking the left picture for example, DND is on.
	DC 5V	Power port
	PC	Connects to a PC.
	Internet	Connects to the Ethernet switch, router or Internet.

3.3 LEDs Indicator

LED		Color	Status	Description
Multi-Functional Key	Speed Dial		OFF	Not configured
			Solid Green	Configured, in standby
			Solid Red	In use
	BLF		OFF	Not configured
			Solid Green	Configured, in standby
			Blinking Red	A new incoming call in BLF number
			Solid Red	In use
	Shortcut Key		OFF	Not configured
			Solid Green	Configured
	Pick Up		OFF	Not configured
			Solid Green	Configured
			Solid Red	In use
Call Park		OFF	Not configured	
		Solid Green	Configured	
 VoIP Lines 1/2			OFF	Line disable
			Solid Light Red	Not registered
			Solid Green	Registered, line is in standby

		Solid Red	Registered, line is in active call
MUTE/DEL		OFF	Disable
		Solid Red	In use, mute is on
Headset		OFF	Standby
		Solid Green	In use
Handsfree		OFF	Standby
		Solid Green	In use
MSG		OFF	In-active
		Blinking Green	An new voicemail
		Solid Green	No new voicemail

3.4 Get Familiar with LCD

LCD	Name	Description of function
	Date	To display the current date. Date format is mm/dd
	Time	To display the current time. Time format is mm:ss (A or P)
	Phone Numbers	To display the phone number of lines.
	Lines	To display the status of lines. The icon  means unregistered. The icon  mean registered.
	Softkey Function	To display the current softkey function.
	Softkey Buttons	You can use the softkey button to highlight the item displayed on the LCD screen and then configuration. One button directs to one softkey function, the blue line in the left picture displays the corresponding relationship.

4 Menu

User can use **MENU**, **soft key** and **MUTE/DEL** button to browse, modify and configure the phonebook, multi-functional keys, network, accounts, factory default and so on.

4.1 Items

The table below lists Menu items which IP622 included:

Main menu (LCD display)	Menu Items (LCD display)	Submenu Items (LCD display)	Explanation
1Phonebook	1.1NewEntry		User can view, add, edit, and delete phonebook using the four softkey. User can also make call, and send text message directly using the four softkey. The Max records are 500.
2 Multi-Functional Key(need password)	2.1Exp Key 1		To configure the function of multi-functional keys.
	2.2Exp Key 2		
	2.3Exp Key 3		
	2.4Exp Key 4		
	2.5Exp Key 5		
	2.6Exp Key 6		
	2.7Exp Key 7		
	2.8Exp Key 8		
	2.9Exp Key 9		
	2.10Exp Key 10		
3Call History	3.1RedialList		To list the latest 60 records of called call, answered call and missed calls.
	3.2Answered Calls		
	3.3Missed Calls		
4Text Message	4.1SEND		User can send message according to prompt.
	4.2RecivedBox		To list the latest 100 records of received message and sent message.
	4.3SendBox		
5BlackList	5.1NewEntry		To configure the blacklist, max record is 100.
6Preferences	6.1Language		To select the language on phone’s LCD.
	6.2Call Waiting		To enable or disable call waiting.
	6.3Auto Answer		To enable or disable auto answer.
	6.4Preferred Audio Device		To select the preferred audio device.
7Ring Tone	7.1Bell Type1		Choose the ring tone from Bell Type1- Bell Type10.
	7.2Bell Type2		

	7.3Bell Type3		
	7.4Bell Type4		
	7.5Bell Type5		
	7.6Bell Type6		
	7.7Bell Type7		
	7.8Bell Type8		
	7.9Bell Type9		
	7.1Bell Type10		
8Volume Setting			Press up or down key to turn up or turn down volume.
9Accounts (need password)	9.1Line 1	9.1.1Line Enable	To enable/disable line1.
		9.1.2Password	To set password of line1.
		9.1.3Account	To set account of line1.
		9.1.4Display Name	To set display name of line1.
		9.1.5Phone Number	To set the phone number of line1.
		9.1.6SIP Proxy Server	To set the SIP server IP address of line 1.
		9.1.7SIP Proxy Port	To set the SIP server port of line1.
		9.1.8Outbound Server	To set the outbound proxy IP address or domain name of line1.
		9.1.9Outbound Server Port	To set the outbound proxy port of line1.
		9.1.10Backup Outbound Server	To set the backup outbound proxy IP address or domain name of line 1.
		9.1.11Backup Outbound Port	To set the backup outbound proxy port of line1.
	9.2Line 2	Same to 9.1	
10Call Forward	10.1CFWD All		To set the destination phone number of CFWD AllNumber
	10.2CFWD When Busy		To set the destination phone number of CFWD Busy Number
	10.3CFWD When No Answer		To set the destination phone number of CFWD No AnsNumber
11Time/Date	11.1Time(H:m:s)		
	11.2Date(m/d/y)		
12Voice Mail (Need password)	12.1Line 1	12.1.1MWI Enable	To enable or disable voice mail of line1
		12.1.2Voice Mail Number	To set the voice mail number of line1.
	12.2Line 2	Same to 12.1	
13Network	13.1WAN Connection Type		To view the current Internet port's connection type, or to change the Internet port connection type from Static, DHCP and PPPoE.
	13.2CurrentIP		To view the current Internet port IP address, or to change the Internet port IP address.
	13.3CurrentNetmask		To view the Current Netmask, or to change the Current Netmask.
	13.4CurrentGateway		To view the Current Gateway, or to change the Current Gateway.
	13.5Primary DNS		To view the primary DNS, or to change the primary DNS.
	13.6Secondary DNS		To view the secondary DNS, or to change the secondary DNS.

	13.7Enable WAN Login		To enable or disable user login webpage from Internet port.
	13.8Web Port		To view the Web Port, or to change the Web Port.
	13.9SIP QoS		To view the SIP QoS, or to change the SIP QoS.
	13.1RTP QoS		To view the RTP QoS, or to change the RTP QoS.
	13.11Data QoS		To view the Data QoS, or to change the Data QoS.
	13.12VLAN Tag		To enable or disable VLAN Tag
	13.13VLANID		To view the VLANID, or to change the VLANID.
	13.14802.1p Priority		To view the802.1p Priority, or to change the802.1p Priority.
14Product Info	14.1Product Name		To view the current information of Product Name, Software Version, Hardware Version, MAC Address and serial number.
	14.2Software Version		
	14.3Hardware Version		
	14.4MAC Address		
	14.5Serial Number		
15Status	15.1Intenet Port Status		To view the current information about the status of Internet port, VPN and registration.
	15.2VPN Status		
	15.3Registration Status		
16Reboot			To reboot IP622.
17Factory Default			To set IP622 factory default.(Need password)
18Set Password			To reset password. The password of LCD is same as the one of Webpage. Default is admin.
19LCD Contrast			To view and change the contrast of LCD.
20Login/Logout			Press it to logout LCD. Press 20Login/Logout to erase memory, and then user should input password when user access to 9Accounts again.

4.2 How to configuration from Menu

- 1) When the phone is on-hook, press the **MENU** button to enter Main menu.
- 2) Use the **Numeric Keypad** to input the digit or character
- 3) Press the **abc softkey button** to change the input method between digit, capital letter and small letter.
- 4) Use the **up** and **down button** to scroll up and scroll down. Configuration the item or sub-item according to the prompt.
- 5) Press the **ok softkey button** to confirm.
- 6) Press the **save softkey button** to save changes.
- 7) Press **MUTE/DEL** button or **delChr softkey button** to delete one digit or a character.

- 8) Press the **cancel softkey button** to cancel changes and back to the up level.
- 9) The password which need when access to Accounts item is the same as the one of admin mode when login Web, default is admin.

5 Using Basic Phone Function

5.1 Using the Handset/ Speakerphone/ Headset

5.1.1 Using the Handset

To place and answer calls using the handset, simply lift the handset.

5.1.2 Using the Speakerphone

To place and answer calls using the speaker, press the **speaker** button. The green light behind the button will illuminate.

5.1.3 Using the Headset

To place and answer calls using the speaker, press the **headset** button. The green light behind the button will illuminate.

5.2 Making Telephone Call

5.2.1 Place a Call

You can place a call by:

Step 1.Lifting the handset and dialing phone number, followed by the # or wait 5 seconds, IP622 will dial out the phone number.

Step 2.Connect the headset, press the headset button and dial phone number, followed by the # or wait 5 seconds, IP622 will dial out the phone number.

Step 3.Press the speaker button and dial phone number, followed by the # or wait 5 seconds, IP622 will dial out the phone number.

5.2.2 Using Redial Button

To redial the last number called:

Lift the handset or press speakerphone or press headset, and then press the **redial** button; the number will be automatically dialed.

5.2.3 Dialing from Phonebook

Adding a phonebook

Below are the steps to add a phonebook in menu, User can also add phonebooks from you PC using IP622 Web Interface.

Step 1.Press **MENU** button access to the menu items, and use the softkey button to choose **1.Phonebook**

Step 2.Add one phonebook according to the prompt, press the **abc softkey button** to change the input method between digit, capital letter and small letter.

Using phonebook:

Press **MENU** button to access to the menu items, and use the softkey button to choose **1.Phonebook**, and then highlight the phonebook you want to call, press the **dial softkey button** to make call immediately.

5.2.4 Dialing from Call History

Press **MENU** button access to the menu items, and use the **up** and **down button** to choose **3.CallHistory**, and then highlight the phone number you want to call, press the **dial softkey button** to dial immediately.

5.2.5 Using Speed Dial

Adding a speed dial:

Below are the steps to add a speed dial from menu, User can also set speed dial from you PC using IP622 Web Interface.

Step 1.Press **MENU** button access to the menu items, and use the **up** and **down button** to choose **2. Multi-Function Key**

Step 2.Configuration one **Multi-Function Key** to speed dial according to the prompt.

Making speed dial:

Press the Multi-Function Key corresponding to speed dial to make call immediately.

5.2.6 Using Dial Plan

Adding one dial plan:

Step 1.Open **Phone/Dial Plan** webpage

Step 2.Add one dial plan, user can refer to 7.7.3 Dial Plan

Using dial plan to make call:

Dial the phone number according to one dial plan.


5.2.7 Using Hot Line

Add the hot line from **SIP Account/Line1/2** webpage, **Supplementary Service Subscription** column, below is one example:

Step 1.Open **SIP Account/Account1/2** webpage, **Supplementary Service Subscription** column

Step 2.Fill in the hot line number, user can also add the delayed time.

Example 1:  set the hot line number is 511.

Example 2:  set the hot line number is 511 and delayed time is 4 seconds.

5.2.8 Answering a Telephone Call

When a call is incoming, the associated line button will flash and the phone will ring.

You can receive the call by:

Step 1.Pressing the corresponding line button or

Step 2.Pressing the speakerphone, or

Step 3.Lifting the handset, or

Step 4.Using the headset, or

Step 5.Auto-answer: if auto-answer is enabled, IP622 will answer the phone automatically when there is a call incoming

Enable auto-answer: press **MENU** button to access to the menu items, then use the **up** and **down button** to choose **6Reference**, set

auto-answer enable according to the prompt.

Notice: user can also enable auto-answer in **Phone/Preference** webpage, **miscellaneous** column.

Miscellaneous

Auto AnswerEnable

Dial Time Out(IDT)5

Auto Hookon ModeEnable

ICMP PingDisable

Auto Answer by CallINFODisable

Call Immediately Key#

Preferred Audio DeviceDisable

Escaped char enableDisable

5.3 Adjusting Call Volume

From menu:

Step 1.Press **Menu** button, and then choose **volume**.

Step 2.Press **up** and **down button** to turn up or turn down volume.

Using multi-function key:

Step 1.Choose two multi-function key (assuming the two multi-function keys are Exp Key 1 and Exp Key 2), and configure as following:

Current Key BoardBasic Board

Key	Type	Mode	Line	Phone Number	Pickup Code
Exp Key 1	Shortcut Key	Volume+			
Exp Key 2	Shortcut Key	Volume-			

Step 2.Press **Save Settings** to save changes and user can see the corresponding LED is solid green.

Step 3.Press the **Exp Key1** button to turn up volume, press the **Exp Key 2** button to turn down volume.

5.4 Black List

If user added a black list, IP622 will forbid the phone number incoming.

Adding a black list:

There are two ways to add black list, one is from menu, and the other is from your PC to use IP622’s webpage.

From menu:

Step 1.Press **Menu** button, and then choose **5black list**.

Step 2.Choose **NewEntry**, and then add one black list according to the prompt.

From Webpage:

Step 1.Log in the web, open **Phone/Phonebook** webpage, **Black List** column.

Step 2.Refer to the **7.6.4.1 Black List** to add blacklist.

5.5 Muting a Call

During an active call, pressing the **MUTE/DEL** button to mute the handset, headset or speakerphone.

This function prevents the person on the active call from hearing what you or someone else in the room is saying; the light behind the button will illuminate on (green).

To cancel the Mute function, please press the **MUTE/DEL** button again and the light behind the button will illuminate off.

5.6 Placing a Call on Hold

When IP622 is during one active call:

Step 1.Pressing the **hold** button to put the active call on hold, then you will hear a dial tone, the remote party will hear the hold music

Step 2.User can input the phone number to make call

Step 3.Pressing the **hold** button again to release the previously Hold state and resume the bi-directional media.

5.7 Three Way Conference Calls

Step 1.To initiate a conference call, press the **HOLD** button during an active call and the first call is placed on hold, and you will hear a dial tone.

Step 2.Dial the second person's telephone number.

Step 3. After the second person answers the call, press **conf softkey button** to start the conference call; all three parties will be participating in a conference call.

Note: If you hang up firstly, the other two parties will be disconnected; if one party hangs up firstly, you can go on talking with the other party.

5.8 Attended Transfer

You call the person to whom you are transferring the call and speak to them before transferring the call:

Step 1. To initiate a transfer; press the **HOLD** button during an active call. This places the first call on hold and you will hear a dial tone.

Step 2. Dial the second person's telephone number.

Step 3. When the second person answers, you can have a private conversation with the second person without the first person hearing it.

Step 4. To connect the call to the second person, press the **xfer softkey button** to complete the transfer. You will be disconnected from the call.

Step 5. If you hang up during the call with the second person before pressing **xfer softkey button**, the transfer is not completed; this only ends the call with the second person, and you can press the **HOLD** button to continue the first call.

5.9 Unattended Transfer

You can transfer an active call to a third party without announcement.

Step 1. To initiate an unattended (blind) transfer; press the **xfer softkey button** during an active call. The first call is placed on hold and you will hear a dial tone.

Step 2. Now dial the second person's telephone number with immediately ending char “#”, IP622 will transfer phone automatically and you will be disconnected from the call.

5.10 Forwarding Calls

You can forward all calls, forward calls when the phone is busy or forward calls when there is no answer.

Below are the steps to configure call forward from menu. You can also set call forwarding options from your PC using the IP Phone Web Interface.

From menu:

Step 1.Press the **MENU** button.

Step 2.Select **10Call Forward** and choose one type of call forwarding.

- CFWD All—Forwards all calls to a single number immediately when there is an incoming call.
- CFWD When Busy—Forwards all calls to another number when the phone is busy.
- CFWD When No Answer—Forwards calls to another number if there's no answer at your phone.

Step 3.Enable the CFWD and fill in the call forwarding number.

Step 4.Press the **save softkey button** to save changes.

5.11 Call Waiting

Before using call waiting, you should enable it firstly, and default is enabling.

During an active call:

Step 1.If call waiting is enabled, call waiting alerts you with ringing if there is another call is incoming, and the associate line button will change to red blinking, press the line key of the second call to answer the second call with the first call holding, pressing the line button of the first call to back to the first call with the second call holding.

Step 2.If the call waiting is off, new calls would be rejecting and the new caller will hear busy tone when you are on another call.

Enable Call Waiting:

You can turn call waiting on or off from menu in **Menu/6References** item.

And user can also enable call waiting by using your PC to open **SIP Account/Line 1/2** webpage, **Supplementary Service Subscription** column.

5.12 Ending a Call

To end a handset call, hang up the handset.

To end a speakerphone call, press the speaker button.

To end a headset call, press the headset button.

5.13 Viewing and Returning Missed Calls

The LCD screen on your IP phone will notify you like the following picture if a call came in that was unanswered.



To return a missed call:

- If the LCD screen shows a missed call:

Step 1. press the **softkey button under miss** to view the call.

Step 2. Press the **softkey button under dial** to return the missed call.

- If the LCD screen does not show a missed call, you can return a call from the Missed Call list:

Step 1. Press the **Menu** button.

Step 2. Then selects **3Call History**.

Step 3. Then selects **Missed Calls**.

Step 4. Choose the call you want to return and press Dial.

To view a list of all missed calls:

- If the LCD screen shows a missed call, press the **softkey button under miss** to view a list of missed calls.

- If the LCD screen does not show a missed call:

Step 1. Press the **Menu** button.

Step 2. Then selects **3Call History**.

Step 3. Then selects **Missed Calls**.

5.14 Text Message

5.14.1 Sending Message

Step 1. Press **Menu** button, and then choose **4Text Message** by using the **up button** or the **down button**.

Step 2. Press the **select softkey button** to enter to **1SEND** item.

Step 3. Press the **select softkey button** to edit message.

Note: When inputting text, use the **abc softkey button** to change the input method among numbers, capital and lowercase English letters, **abc** stands lower case, **ABC** stands capital letter, and **123** stands digit

Step 4. Press the **ok softkey button** to input **receivers' phone number**.

Notice: IP622 support group mails, user can send one message to 10 friends or family one a time;

Press the **ok softkey button** to access to configuration the next receiver's phone number;

You can select one number in phonebook by pressing the **pbook softkey button**.

If user has configuration the phone numbers which you want to send, press the **ok softkey button** twice to access to the next item (**Sender number**).

Step 5. Set Sender phone number, default is line1's phone number.

Step 6. Press the **select softkey button** to start sending message.

5.14.2 Reading Message

Step 1. Press **Menu** button, and then choose **4Text Message** by using the **up button** or the **down button**.

Step 2. Press the **select softkey button** to enter to **2Recived Box** item or **Send Box** item.

Notice: In Received Box are messages have received from others including new messages and old messages. The ones in Sent Box are messages have sent out.

Step 3. Press the **select softkey button** to access to the next item. Choose the message you want to read by using the **up button** or the **down**

button.

5.15 DND (Do Not Disturb)

Use the Do Not Disturb feature to prevent incoming calls from ringing your phone.

To enable Do Not Disturb, push the DND button to the side near the DND dot, below is one picture:



6 Using Advanced Phone Functions

6.1 Speed Dial

Creating Speed Dial:

Following are the steps to creating speed dials in webpage; you can also creating it from LCD Menu.

Step 1. Access to web, and then open **Phone/Multi-Functional Key** webpage

Step 2. Then configures one Exp key to speed dial, and then choose the line and fill in the phone number. The following picture is a setting example:

Key	Type	Mode	Line	Expansion	Pickup Code
Exp Key 1	Speed Dial		Auto	111	
Exp Key 2	Speed Dial		Line 2	112	

Step 3. Press button to save changes and then press button to make changes effective.

Using Speed Dials:

Step 1. Press the configured Exp Key 1 to call 111 or press Exp Key 2 to call 112 immediately.

6.2 BLF (Busy Lamp Field)

Your system administrator may configure your phone so that you can monitor other user’s phones from your phone. User can create BLF from **Menu/Multi-functional key** or from your PC in **Phone/Multi-Functional Key** webpage.

If this feature is configured, some multi-functional key buttons on your phone are assigned to display the status of another user’s phone. For example, if your one multi-functional key is configured to display Bob’s phone line, the associate multi-functional key shows you the status of his phone line:

- ◆ Green: Line is idle.
- ◆ Red (steady): Line is active or in use.

◆ Red (blinking): Line is ringing.



In addition, if you have configured the pickup code in BLF, you can press the same multi-functional button to pick up a ringing call at his extension.

The example below describes the steps to configuration the pickup in BLF from Webpage, user can also configuration from **MENU**.

Configure the pickup code in BLF:

Step 1. Access to web, and then open **Phone/Multi-Functional Key** webpage

Step 2. Then configures one Exp key to BLF, and set **Pickup Code** (you can get the pickup code from your administrator). The following picture is a setting example based on Asterisk

Step 3. Press  button to save changes and then press  button to make changes effective.

Key	Type	Mode	Line	Expansion	Pickup Code
Exp Key 1	BLF		Line 2	003	*8

To pick up a ringing call:

Step 1. Assuming a ringing call at **003** and the associate LED is blinking.

Step 2. Press  **line2 button**, and then press the **Exp key 1** button to pickup the call.

6.3 Shortcut Key

The steps below described how to configure the shortcut key from Webpage, user can also configure from **MENU**.

Creating Shortcut Key:

Step 1. Access to web, and then open **Phone/Multi-Functional Key** webpage

Step 2. Then configures the Exp keys to shortcut key, and set as you need. The following picture is a setting example:

Key	Type	Mode	Line	Expansion	Pickup Code
Exp Key 1	Shortcut Key	Phonebook			
Exp Key 2	Shortcut Key	Call History			
Exp Key 3	Shortcut Key	Text Message			
Exp Key 4	Shortcut Key	Volume+			
Exp Key 5	Shortcut Key	Volume-			
Exp Key 6	Shortcut Key	Login/Logout			

Step 3.Press  button to save changes and then press  button to make changes effective.

Using shortcut Key:

Press the Exp Key 1, then the LCD will display the phonebook item immediately, and user can configure it, the steps are same as configuring from menu.

Press the next Exp Keys, and the LCD will display the corresponding item immediately, and user can also configure it.

6.4 Pickup

The function of pickup is similar to the speed dial.

The example below describes the steps to configuration the pickup from Webpage, user can also configuration from **MENU**.

Adding pickup:

Step 1.Log in the web, open **Phone/Multi-functional Key** webpage.

Step 2.Choose one Exp key (assuming is Exp Key 3), and configure as follows, user can refer to **7.6.2 Multi-functional Key**:

Exp Key 3

Call Pickup

Line 1

010235689

Step 3.Press  button to save changes and then press  button to make changes effective.

Using pickup:

Press the **Exp Key 3** button (the configured multi-functional key) to ring 010235689 quickly.

6.5 Call Park

Call Park is a feature of some telephone systems that allows a person to put a call on hold at one telephone set and continue the conversation

from any other telephone set.

During an active call, pressing one preprogrammed multi-functional key button to transfer the current telephone conversation to an unused extension number and immediately puts the conversation on hold. The telephone system will then display the extension number of the parked call so that the call can later be retrieved.

If no one picks up the parked call within the set time, the telephone system may ring back the parked call. This transfers the parked call back to the person who originally parked the call.

The example below describes the steps to configuration the call park from Webpage, user can also configuration from **MENU**.

Adding Call Park:

Step 1.View the parking settings in sip server, below is an example in **TrixBox**

Parking Lot Configuration

Parking Lot Options

Enable Parking Lot Feature

☒

Parking Lot Extension:

70

Number of Slots:

8

Parking Timeout:

45 seconds

Parking Lot Context:

parkedcalls

Step 2.Log in the web, open **Phone/Multi-functional Key** webpage.

Step 3.Choose one Exp key (assuming is Exp Key 6), and configuration as follows, user can refer to **7.6.2 Multi-functional Key**:

Exp Key 6

Call Park

Line 1

70

Step 4.Press

Save

 button to save changes and then press

Reboot

 button to make changes effective.

Using Call Park:

Step 1.During an active call (assuming party 1(IP622)’s phone number is 6221, party 2’s phone number is 111)

Step 2.Party 1 press the **Exp Key 6** button (the configured multi-functional key) to park the current conversation and listen the voice prompt patiently,

Step 3.Party 3 dialing **71** using another phone to retrieve the call with party 2.

6.6 MSG

Voice Mail service must be available on your network to use this feature.

6.6.1 Enable and configuration MSG

There are two ways to enable MSG, one is from menu, and the other is from your PC to use IP622’s webpage.

From Menu:

Step 1.Press **Menu** button to enter menu items and then choose **12Voice Mail**

Step 2.Highlight the line you want to configure, and then select it

Step 3.And then use the **softkey buttons** to configure it according to the prompt(Enable MWI and enter the voice mail number)

Step 4.Press the **save softkey button** to save the changes

From Webpage:

Step 1.Log into Web, open **SIP Account Line 1/2webpage**, go to **Supplementary Service Subscription** column.

Step 2.Enable **MWI Enable** and fill in the **Voice Mailbox Numbers** (get the number from your phone administrator), below is a settings example based on Asterisk.

Supplementary Service Subscription

Supplementary Services

Call Waiting	Enable ▾	Hot Line	<input type="text"/>
MWI Enable	Enable ▾	Voice Mailbox Numbers	<input type="text" value="*97"/>

Step 3. Press  button to save changes, then the notice **Please REBOOT to make the changes effective!** will appear, press  button to make changes effective.

6.6.2 Using MSG

To access you voice mail box, press the **MSG** button.

Then user can listen to the new voice mail or old voice mail or reply voice mail according to the voice prompt.

6.7 Changing the LCD Screen Contrast

Step 1. Press the **Menu** button, scroll to **19LCD Contrast**, and press the **Select softkey button** to access.

Step 2. Use the **up** and **down buttons** to adjust the screen contrast. Press the **Up** button to increase the contrast. Press the **Down** button to decrease the contrast.

Step 3. Press the **save softkey button** to save.

6.8 Changing Your Ring Tone

To change a ring tone:

Step 1. Press the **Menu** button.

Step 2. Select **7 Ring Tone**.

Step 3. Use the **up** and **down buttons** to highlight the ring tone. Press the **select softkey button** to choose the highlighted ring tone.

6.9 Setting Your Phone's Date and Time

The date and time for your phone normally come from the phone server. However, if you need to change some date and time parameters, you can follow these steps:

Step 1. Press the **Menu** button, select **11Time/Date**.

Step 2. Choose **date** to adjust date; enter the date in the following format: **mm/dd/yy**.

Step 3. Choose **time** to adjust time; enter the time in the following format: **hh/mm/ss**.

Step 4. Press the **ok softkey button** to save the changes.

6.10 Rebooting Your Phone

This setting is to configure and troubleshoot the network. You should not change these settings unless directed to by your Administrator as this can negatively affect your phone's function.

To reboot your phone:

Step 1. Press the **Menu** button.

Step 2. Scroll to **16 Reboot**; press the **select softkey button** to access to reboot item.

Step 3. Then a notice “**Confirm System Reboot**” will appear, press the **ok softkey button** to confirm rebooting.

6.11 Factory default

There are three ways to make factory default: in menu and using web GUI. You should not change these settings unless directed to by your Administrator as this can negatively affect your phone's function.

In menu:

Press **Menu** button and choose **17 Factory Reset**, user is required to input the password, then a notice will appear, press the **ok softkey button** to continue.

In menu:

Press **##06#** on the phone and select **4 Factory Reset**, then there is a notice inform you to confirm the performance, enter **yes(937)**, then phone will be factory default.

Using Website:

Step 1. Access to website, open **Administration/Management** webpage;

Step 2. Press the **factory default** button at the bottom of the webpage;

Factory Defaults

Reset to Factory Default

Factory Default

Save

Cancel

Reboot

Step 3.Waiting about 5 seconds, the red notice *Please REBOOT to make the changes effective!* will appear, and then press **Reboot** button to reboot IP622.

Notice: If you choose factory default, you will return the phone to the original factory settings and will erase all current settings, including the directory and call logs.

7 CONFIGURATION

7.1 Web-based Configuration

This section will show you how to configure your IP622 using the web-based configuration interface. The default network settings are the following:

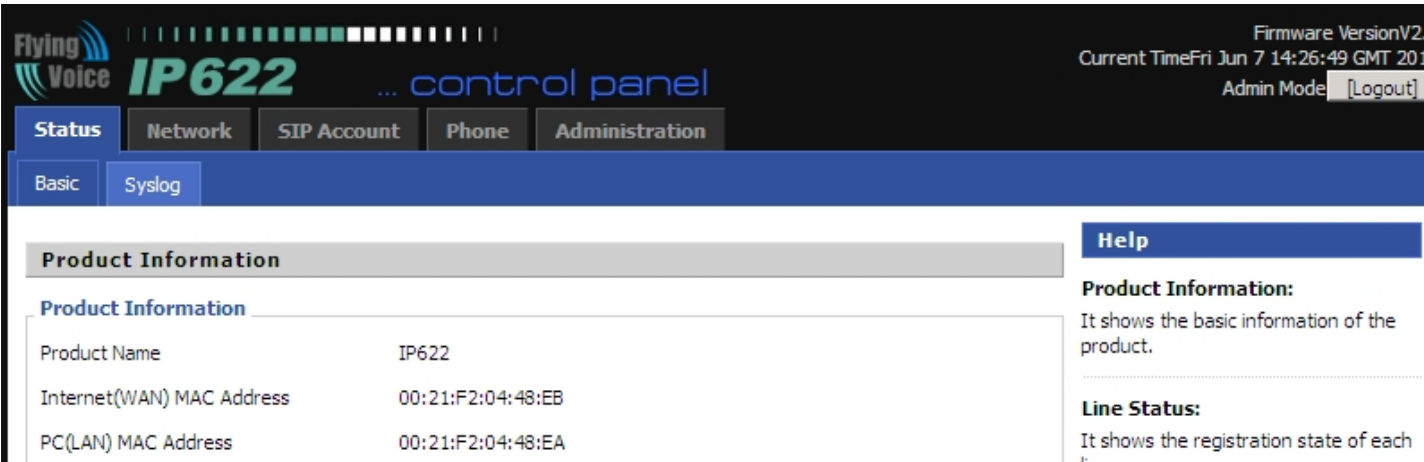
Default Internet Connection Type: **DHCP**

Default PC Port Connection Type: **NAT**

Default user name and password of admin mode
admin, admin

Default user name and password of user mode:
user,user

Web Idle Timeout: **5 min**



7.2 Login

To access the phone through a web browser

Step 1.Setup IP622 correctly

Step 2.Lookup the Internet IP Address in the left side of LCD

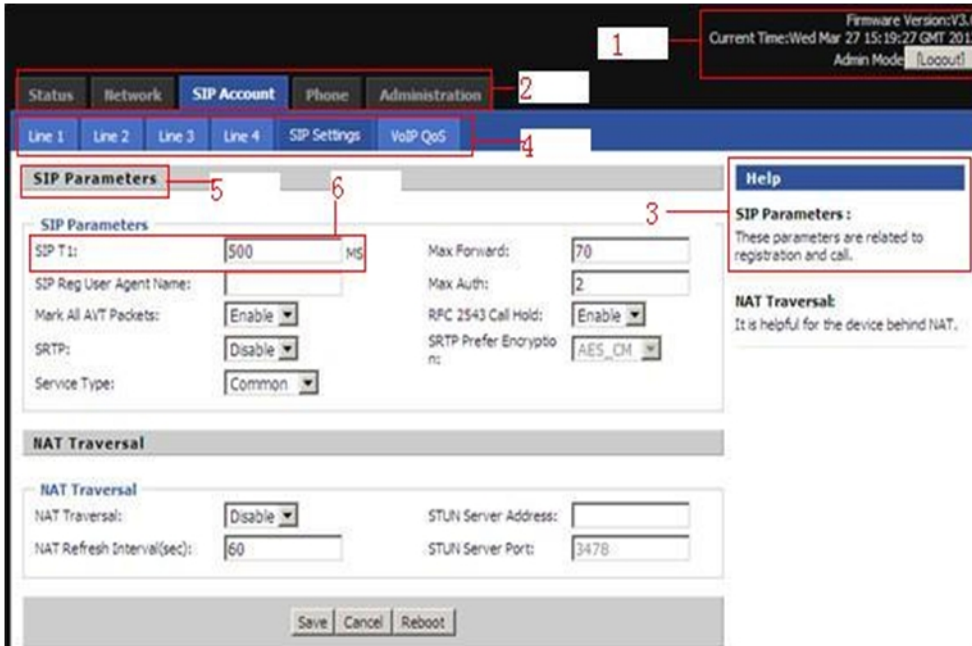
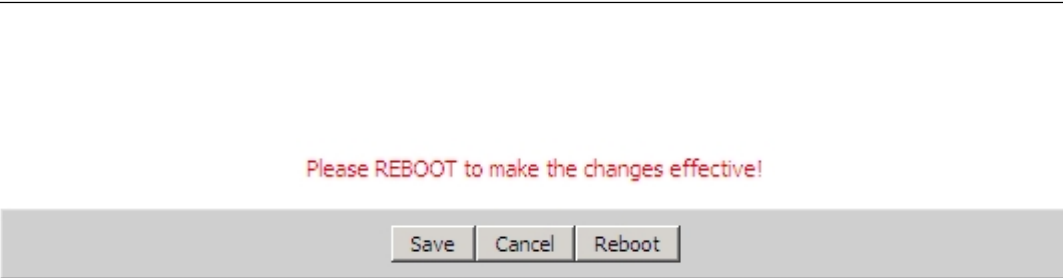
Step 3.Enter “**http://Internet IP Address**” in the address field of the browser.

Step 4.Type “**admin**” or “**user**” for the User Name, and input the password click on the **Login** button to access the configuration page.

There are two levels of web configuration: one “user” ID level that can view just some portion in the web, and the other “admin” ID level that can view and configure all settings in the web-based configuration interface.

7.3 Webpage

No.	Name	Description
1	main information	Display the firmware version, DSP version, Current Time, and administration mode. Press Logout button to logout.
2	navigation bar	Click navigation bar, many sub-navigation bar will appear in the place 4.
3	Help	Display the main information for configuration; user can get help from it directly.
4	sub-navigation bar	Click sub-navigation bar to enter to configuration webpage
5	configuration title	The configuration title
6	configuration bars	The configuration bars

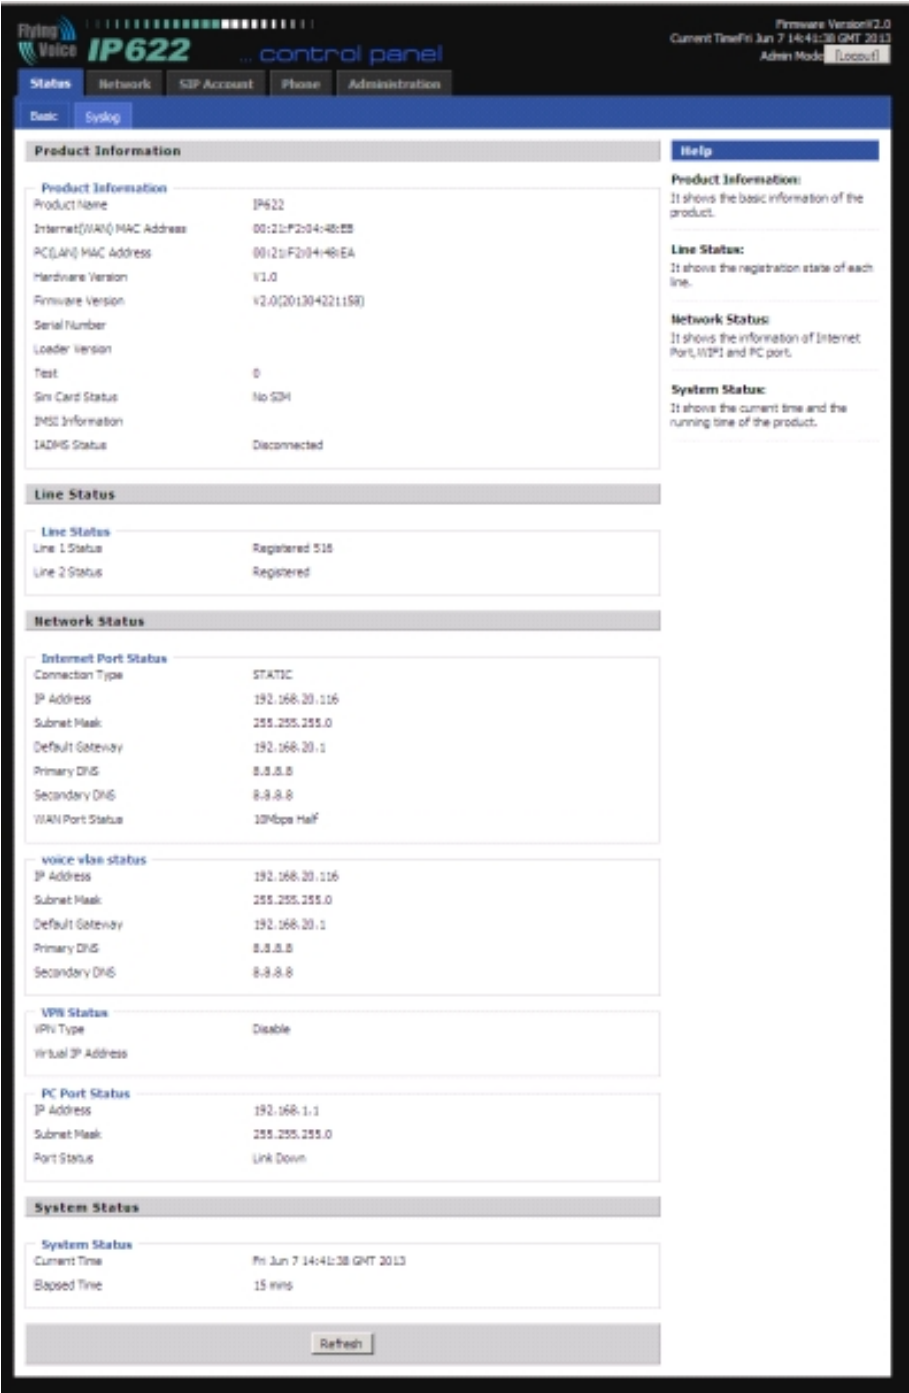
	
	<p>◆ Every time making some changes, user should press the button to confirm and save the changes.</p> <p>◆ After pressing the button, the red Please REBOOT to make the changes effective! will appear to notice user to reboot.</p>

7.4 Status

7.4.1 Basic

This webpage displays the basic status of your IP622, including the information about product information, SIP account status, network status, VPN status, PC port status and system status.

Click **Refresh** button to refresh the status.



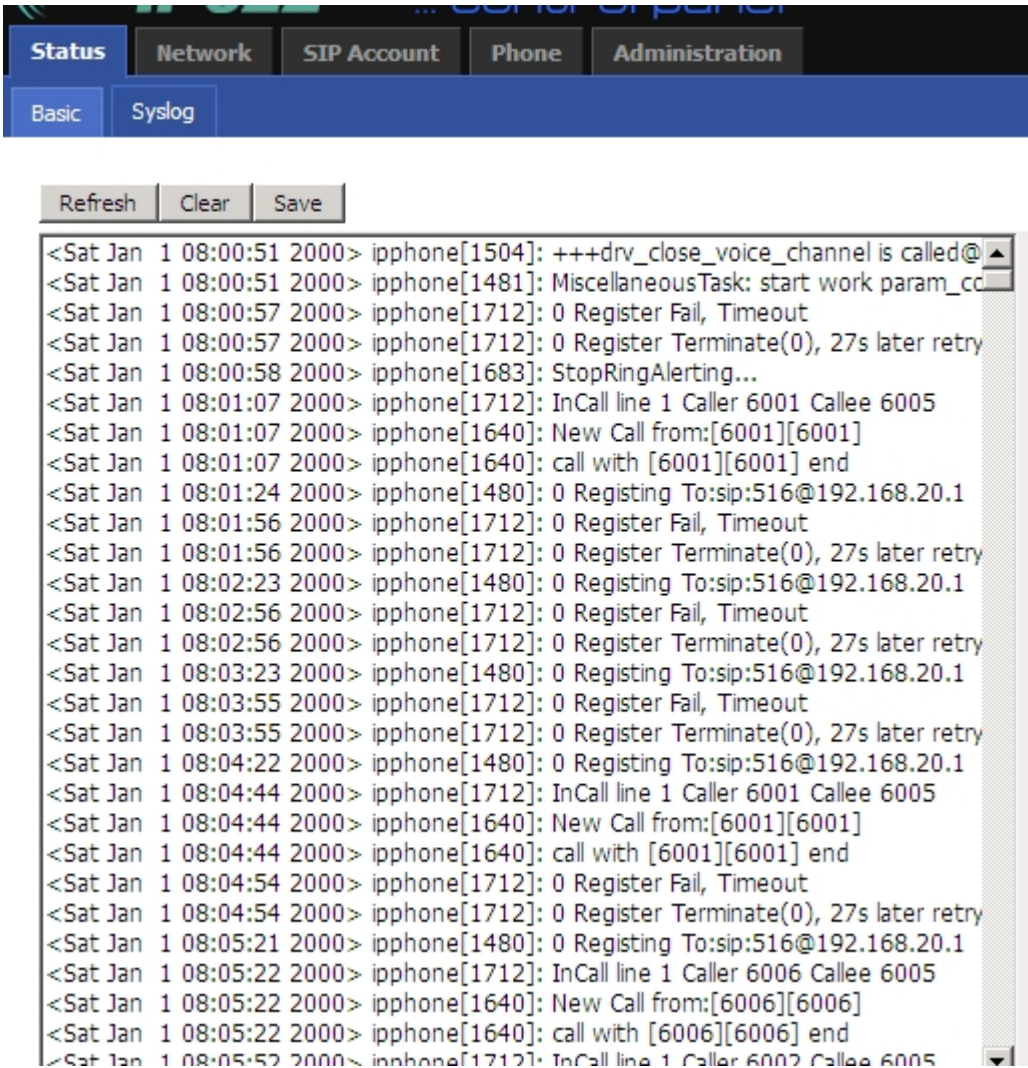
7.4.2 Syslog

This page displays the log of system.

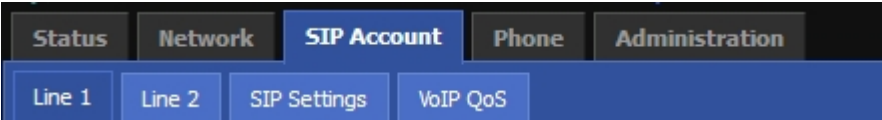
User can press **Clear** button to clear all information.

Click **Refresh** button to refresh syslog.

Click **Save** to save the system log to your local PC.



7.5 SIP Account



7.5.1 SIP Settings

7.5.1.1 SIP Parameters

SIP Parameters

SIP Parameters

SIP T1

500

MS

SIP Reg User Agent Name

Mark All AVT Packets

Enable

SRTP

Disable

Service Type

Common

Max Forward

70

Max Auth

2

RFC 2543 Call Hold

Enable

SRTP Prefer Encryption

AES_CM

7.5.1.2 NAT Traversal

Webpage	Field Name	Description
<div><div>NAT Traversal</div><div><div>NAT Traversal</div><div><div><div>NAT Traversal</div><div>Disable</div></div><div><div>NAT Refresh Interval(sec)</div><div>60</div></div><div><div>STUN Server Address</div><div></div></div><div><div>STUN Server Port</div><div>3478</div></div></div></div></div>	NAT Traversal	If or not enable NAT. IP622 supports STUN traversal, choose “STUN” in the “NAT Traversal Mode” if you want traverse NAT/Firewall.
	STUN Server IP	STUN server IP address, default is stun.fwdnet.net
	NAT Refresh Interval (sec)	The interval to refresh
	STUN Server Port	STUN port

7.5.2 Line1

In this webpage, users can configuration the information about SIP account line1, including the following 4 parts: Basic, Audio Configuration, Supplementary Service Subscription and Advanced.

Following is the description about that.

7.5.2.1 Basic

Set the basic information provided by your VOIP Service Provider, such as Phone Number, Account, password, SIP Proxy and so on.

Webpage	Field Name	Description
<div><div>Basic</div><div>Basic Setup</div><div><div>Line Enable</div><div>Enable</div><div>Peer To Peer</div><div>Enable</div></div><div>Proxy and Registration</div><div><div>Proxy Server</div><div>192.168.20.174</div><div>Proxy Port</div><div>5060</div><div>Outbound Server</div><div></div><div>Outbound Port</div><div>5060</div><div>Backup Outbound Server</div><div></div><div>Backup Outbound Port</div><div>5060</div></div><div>Subscriber Information</div><div><div>Display Name</div><div>3001</div><div>Phone Number</div><div>3001</div><div>Account</div><div>3001</div><div>Password</div><div>••••</div></div></div>	Line Enable	If or not enable Line1
	Peer to Peer	If or not enable PEER to PEER ◆ If enable, Line1 will not send register request to SIP server; ◆ In System Status, SIP-1 Status is Registered; SIP-1 can make call out, but others can not call SIP-1.
	Proxy Server	The domain or IP address of SIP Server
	Proxy Port	The port which SIP Server supports for VOIP service, default is 5060
	Outbound server	Outbound server IP or domain name
	Outbound Port	Outbound server’s Service port
	Backup Outbound Server	Backup Outbound server IP or domain name.
	Display Name	The number will display in callee
	Phone Number	Number of telephone provided by SIP server
	Account	SIP account provided by SIP server
	Password	SIP password provided by SIP server

7.5.2.2 Audio Configuration

Select the audio Codec you want to use.

Webpage	Field Name	Description
	Audio Codec Type1	Choose the audio codec type from G.711U, G.711A, G.722, G.729, G.723
	Audio Codec Type2	Choose the audio codec type from G.711U, G.711A, G.722, G.729, G.723
	Audio Codec	Choose the audio codec type from G.711U,

Audio Configuration

Codec Setup

Audio Codec Type 1

G.711U

Audio Codec Type 2

G.711A

Audio Codec Type 3

G.729

Audio Codec Type 4

G.722

Audio Codec Type 5

G.723

G.723 Coding Speed

5.3k bps

Packet Cycle(ms)

20ms

Silence Supp

Disable

Echo Cancel

Enable

Type3	G.711A, G.722, G.729, G.723
Audio Codec Type4	Choose the audio codec type from G.711U, G.711A, G.722, G.729, G.723
Audio Codec Type5	Choose the audio codec type from G.711U, G.711A, G.722, G.729, G.723
G.723 Coding Speed	Choose the speed of G.723 from 5.3kbps and 6.3kbps
Packet Cycle	The RTP packet cycle time
Silence Supp Enable	If or not enable silence
Echo Cancel	If or not enable echo cancel,default is enable.

7.5.2.3 Supplementary Service Subscription

Webpage	Field Name	Description
<div>Supplementary Service Subscription</div> <div>Supplementary Services</div> <div><div>Call Waiting</div><div>Enable</div><div>Hot Line</div><div></div><div>MWI Enable</div><div>Disable</div><div>Voice Mailbox Numbers</div><div></div></div>	Call Waiting	If or not enable Call waiting.
	Hot Line	Fill in the hot line number. Pickup handset or press speaker/headset button, IP622 will dial out the hot line number automatically.
	MWI Enable	If or not enable MWI (message waiting indicate).
	Voice Mailbox Numbers	Fill in the voice mailbox phone number

7.5.2.4 Advanced

Webpage	Field Name	Description
	Domain name Type	If or not use domain name in the SIP URI
	Carry Port Information	If or not carry Port information in the SIP URI.
	Signal Port	The local port of SIP protocol, default is 5060
	DTMF Type	Choose the DTMF type from IN_band, RFC2833 and SIP INFO.
	RFC2833 Payload (>=96)	User can use the default setting

Advanced

Advanced Setup

Domain Name Type

Enable

Signal Port

5060

RFC2833 Payload(>=96)

101

RTP Port

0

=0 auto select)

Session Refresh Time(sec)

0

Prack Enable

Enable

Keep-alive Interval(10-60s)

15

Anonymous Call Block

Disable

Use OB Proxy In Dialog

Disable

Dial Prefix

Only Recv Request From Server

Disable

Hold Method

ReINVITE

Carry Port Information

Disable

DTMF Type

RFC2833

Register Refresh Interval(sec)

3600

Cancel Message Enable

Disable

Refresher

UAC

SIP OPTIONS Enable

Disable

Anonymous Call

Disable

Proxy DNS Type

A Type

VPN

Disable

User Type

IP

Request-URI User Check

Disable

Register Refresh Interval	The interval between two normal Register messages. You can use the default setting.
RTP Port	Set the port to send RTP. IP Phone will select one idle port for RTP if you set “0”, otherwise use the value user set.
Cancel Message Enable	When you set enable, an unregistered message will be sent before registration, while you set disable, unregistered message will not be sent before registration. You should set the option for different Proxy.
Prack Enable	If or not enable prack.
SIP OPTIONS Enable	If this option enable, IP Phone will send SIP-PING to Server periodically instead of sending hello packet. The send interval is Keep-alive interval.
Keep-alive interval (10-60s)	The interval that IP Phone will send an empty packet to Proxy.
Anonymous Call	If or not enable anonymous call.
Anonymous Call Block	If or not enable anonymous call block.
Proxy DNS Type	Set the proxy DNS type.
Use OB Proxy In Dialog	If or not enable OB Proxy in dialog.
VPN	If or not enable VPN.
Dial Prefix	The prefix added before the number user dials.
User Type	Select the user type, options are IP and Phone.
Only Recv Request From Server	If or not enable only receive request from SIP server.
Request-URI User Check	If or not enable request-uri user check.
Hold Method	Select hold method, options are ReINVITE and Info.

7.5.3 Line2

The parameters of Line2 are same as Line1 except the value of **Line Enable**.

7.5.4 VoIP QoS

Webpage	Field Name	Description
---------	------------	-------------

<div><div>QoS Settings</div><div><div>Layer 3 QoS</div><div><div>SIP QoS(0-63)</div><div>0</div></div><div><div>RTP QoS(0-63)</div><div>0</div></div><div><div>Data QoS(0-63)</div><div>0</div></div></div></div>	SIP/RTP/Data Qos	Default is 0, user can set from 0~63.
---	------------------	---------------------------------------

7.6 Network

7.6.1 Basic

User can configure the parameters of Internet Port, PC port and Network Address Server Settings (DHCP). The details are as follows:

7.6.1.1 Internet Port (WAN)

Static:

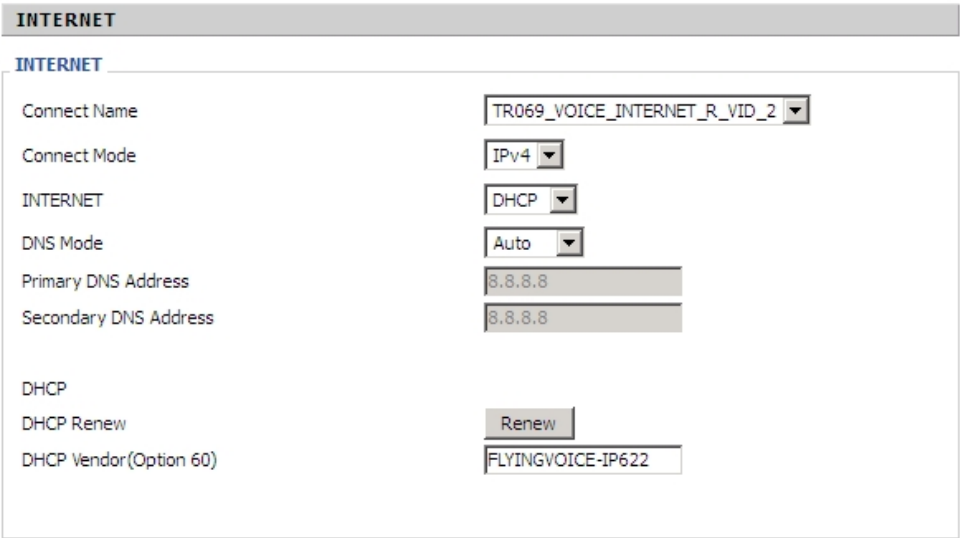
In static mode, user should fill in the values of IP Address, Subnet Mask, Default Gateway, Primary DNS and Second DNS got from your administrator.

Webpage	Field Name	Description
<div><div>INTERNET</div><div><div>INTERNET</div><div><div>Connect Name</div><div>TR069_VOICE_INTERNET_R_VID_2</div></div><div><div>Connect Mode</div><div>IPv4</div></div><div><div>INTERNET</div><div>Static</div></div><div><div>Static</div><div><div>IP Address</div><div>192.168.20.116</div></div><div><div>Subnet Mask</div><div>255.255.255.0</div></div><div><div>Default Gateway</div><div>192.168.20.1</div></div><div><div>DNS Mode</div><div>Manual</div></div><div><div>Primary DNS Address</div><div>8.8.8.8</div></div><div><div>Secondary DNS Address</div><div>8.8.8.8</div></div></div></div></div>	Connect Name	This parameter is the WAN port service mode, user can set the parameters in Multi WAN page.
	Connect mode	Connection mode, it si IPv4.
	Internet	Choose Static IP.
	IP Address	The IP address of Internet port
	Subnet Mask	The subnet mask of Internet port.
	Default Gateway	The default gateway of Internet port.
	Primary DNS	The primary DNS of Internet port.
	Second DNS	The second DNS of Internet port.

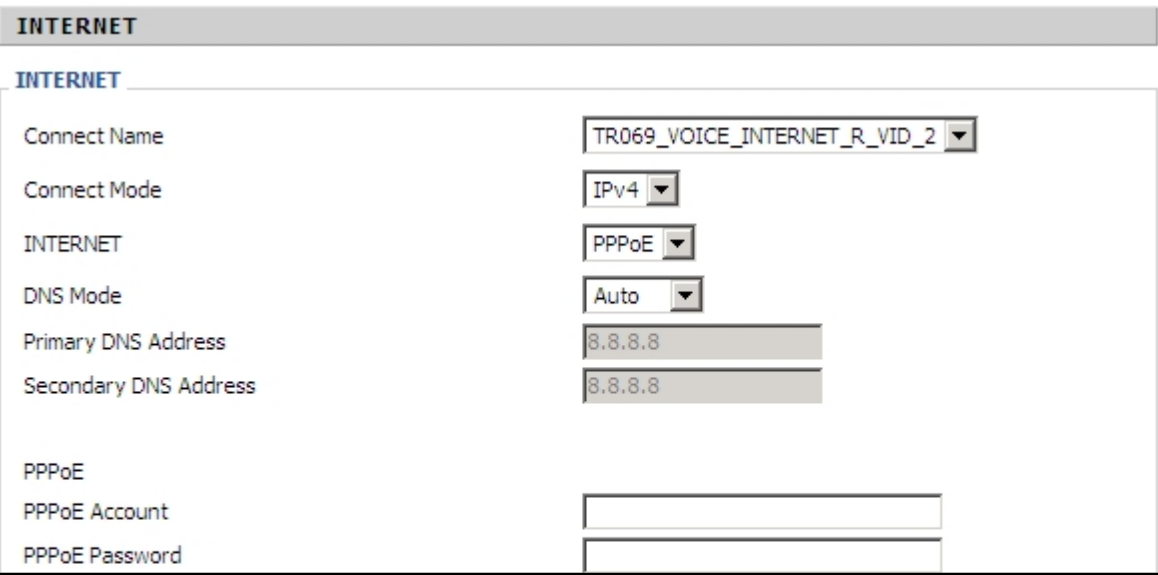
DHCP:

In DHCP mode, IP phone is a DHCP client.

IP phone will get the IP Address, Subnet Mask and Default Gateway from the DHCP server.

Webpage	Field Name	Description
	Internet	Choose Automatic Configuration-DHCP.
	DNS Mode	Choose DNS type from Manual and Automatic ◆In Manual: user should set the Primary DNS and Second DNS manually. ◆In Automatic: IP Phone will get the Primary DNS and Second DNS from DHCP Server automatically.
	Primary DNS	The primary DNS of Internet port.
	Secondary DNS	The secondary DNS of Internet port.
	DHCP Renew	Renew the DHCP.
	DHCP Vendor	Specify the DHCP vendor field.

PPPoE:

Webpage	Field Name	Description
	Internet	Choose PPPoE.
	DNS Mode	Choose DNS type from Manual and Automatic ◆In Manual: user should set the Primary DNS and Second DNS manually. ◆In Automatic: IP Phone will get the Primary DNS and Second DNS from DHCP Server automatically.
	Primary DNS	The primary DNS of Internet port.
	Secondary DNS	The secondary DNS of Internet port.
	PPPoE Account	Fill in the PPPoE account which user gets from Internet Service Provider
	PPPoE Password	Fill in the PPPoE account which user gets from Internet Service Provider
	Confirm	Fill in the PPPoE password again.

<div>Operation Mode<div>On Demand</div></div> <div>On Demand Idle Time(0-60m)<div>5</div></div>	Password	
	Operation Mode	<div>Select operation mode, options are Keep Alive, On demand and Manual.</div> <div>◆When the mode is Keep Alive, user need specify the keep alive redial period, arranges are 0~3600s, default is 5min.</div> <div>◆ When the mode is on demand, user need specify the on demand idle time, arranges are 0~60min, default is 5min.</div> <div>◆When the mode is manual, user need not to input this.</div>

7.6.1.2 PC Port (LAN)

Webpage	Field Name	Description
<div><div>PC Port(LAN)</div><div><div>PC Port(LAN)</div><div><div>Local IP Address<div>192.168.1.1</div></div><div>Local Subnet Mask<div>255.255.255.0</div></div><div>Local DHCP Server<div>Enable</div></div><div>DHCP Start Address<div>192.168.1.2</div></div><div>DHCP End Address<div>192.168.1.254</div></div><div>DNS Mode<div>Auto</div></div><div>Primary DNS<div>8.8.8.8</div></div><div>Secondary DNS<div>8.8.8.8</div></div><div>Client Lease Time(0-86400s)<div>86400</div></div><div>DNS Proxy<div>Disable</div></div><div><div>Save</div><div>Cancel</div><div>Reboot</div></div></div></div></div>	Local IP address	Set the IP address of PC port. Efficient when user choose NAT.
	Local Subnet Mask	Set the subnet mask of PC port. Efficient when user choose NAT.
	Local DHCP server	If or not enable DHCP server.
	DHCP Start Address	This is the start IP address assigned by the DHCP server.
	DHCP End Address	This is the end IP address assigned by the DHCP server.
	DNS Mode	Choose DNS type from Manual and Automatic ◆ In Manual: user should set the Primary DNS and Second DNS manually. ◆ In Automatic: IP Phone will get the Primary DNS and Second DNS from DHCP Server automatically.
	Primary DNS	The primary DNS.
	Secondary DNS	The secondary DNS.
	Client Lease Time (0-86400s)	The DHCP Client lease time, measured in seconds, default is 86400s.
	DNS Proxy	If or not enable DNS proxy.

7.6.2 MAC Address Clone

Webpage	Description
<div><div>MAC Address Clone</div><div><div>MAC Address Clone</div><div><div>MAC Address Clone</div><div>Enable</div></div><div><div>MAC Address</div><div></div><div>Get Current PC MAC</div></div></div></div>	<p>MAC is the hardware address of network equipment. Sometimes, network providers may bind network account with the network equipment’s MAC address. So you may not pass the provider’s authentication when you use a new IP622. In this case, you can use MAC Clone to copy your PC’s MAC address to IP622’s Internet port.</p> <p>MAC is an important parameter for network equipments, so you should make sure that the MAC is right, in order to prevent to make IP622 unusable.</p> <p>You can login IP622’s Web via PC port if you are incautious to make it wrong. And then cloning the right MAC or resume the default settings.</p> <p>Step 1 Press <div>Get Current PC MAC</div> button to get the PC’s MAC address</p> <p>Step 2 Press <div>Save</div> to save the changes</p> <p>Step 3. Press <div>Cancel</div> to cancel MAC address clone.</p> <p>Step 4. Press <div>Reboot</div> to reboot IP622.</p>

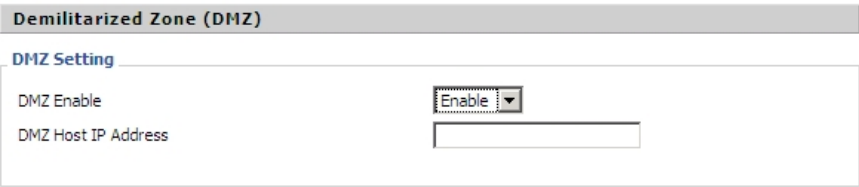
7.6.3 VPN

A Virtual Private Network (VPN) is the extension of a private network that encompasses links across shared or public networks like the Internet. In short, by VPN technology, you can send data between two computers across a shared or public network in a manner that emulates the properties of a point-to-point private link.

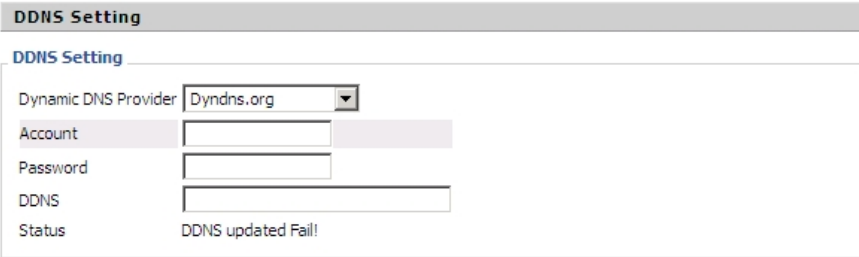
Webpage	Field Name	Description
<div><div>VPN Settings</div><div><div>Administration</div><div><div>VPN Enable</div><div>PPTP</div></div><div><div>Initial Service IP</div><div></div></div><div><div>User Name</div><div></div></div><div><div>Password</div><div></div></div></div></div>	VPN Enable	If or not enable VPN. And user can choose the VPN mode from PPTP and L2TP.
	Initial Service IP	VPN server IP address
	User Name	The user name for authentication
	Password	Password for authentication

7.6.4 DMZ

IP622 provides a facility DMZ Host that maps ALL unsolicited data on any protocol to a single host in the LAN. Regular web surfing and other such Internet activities from other clients will continue to work without inappropriate interruption. DMZ Host allows a defined internal user to be totally exposed to the Internet, which usually helps some special applications such as Netmeeting or Internet Games etc.

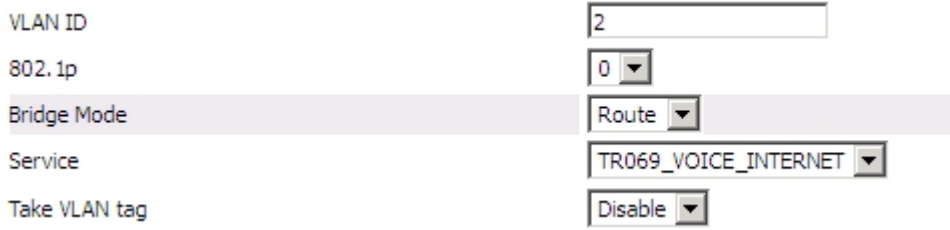
Webpage	Field Name	Description
	DMZ Enable	If or not enable DMZ
	DMZ Host IP Address	Set the IP address of DMZ host

7.6.5 DDNS

Webpage	Field Name	Description
	Dynamic DNS Provider	Select the DDNS provider.
	Account	Enter the account user gets from the DDNS provider.
	Password	Enter the password user gets from the DDNS provider.
	DDNS	Enter the DDNS domain.
	Status	Display the DDNS status.


7.6.6 Multi WAN

Webpage	Field Name	Description
	Index	Index
	Name	The name of service mode.

	VLAN ID	VLAN ID
	802.1p	802.1p priority, user can choose from 0 to 7.
	Edit	Click edit to edit the current vlan.
	Delete	Click delete to delete the current vlan.
	Add	Click Add to add another vlan.
	Click Edit, the webpage displays as left.	
	VLAN ID	Set VID, it can be 2~4094.
	802.1p	802.1p priority, user can choose from 0 to 7.
	Bridge Mode	Set network connection type, it can be Route or Bridge.
	Service	Select the service mode of this port.
	Take VLAN tag	If or not enable take VLAN tag.

7.7 Phone

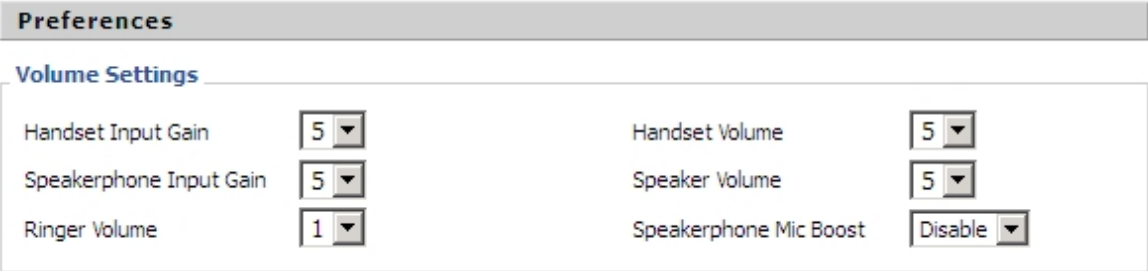
User can configuration volume, call forward, multi-functional key, dial plan, phonebook and call log.



7.7.1 Preference

User can configure the value of ring volume, speakerphone volume, handset volume and so on.

7.7.1.1 Preference

Webpage	Field Name	Description
	Handset Input Gain	Adjust the handset input gain from 0-7.
	Handset Volume Gain	Adjust the output gain from 0-7.
	Speakerphone Input Gain	Adjust the speakerphone input gain from 0-7.
	Speaker Volume	Adjust the speaker volume form 0-7.
	Ringer Volume	Adjust the ringer volume form 0-7.
	Speakerphone Mic Boost	If or not increase the MIC volume 20 db.

7.7.1.2 Regional

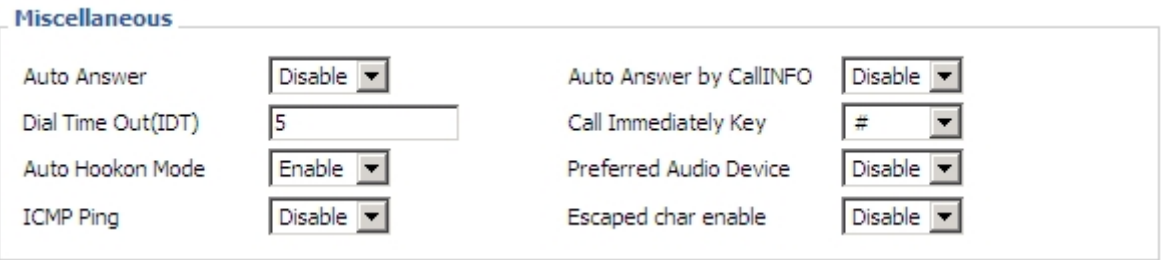
Webpage	Field Name	Description
<div><div>Regional</div><div><div>Tone Type</div><div>USA</div><div></div></div><div><div>Dial Tone</div><div></div></div><div><div>Busy Tone</div><div></div></div><div><div>Off Hook Warning Tone</div><div></div></div><div><div>Ring Back Tone</div><div></div></div><div><div>Call Waiting Tone</div><div></div></div><div><div>Min Jitter Delay(ms)</div><div>0</div><div>Max Jitter Delay(ms)</div><div>80</div></div><div><div>Ringing Time(Sec)</div><div>60</div></div></div>	Tone Type	Choose tone type form China, US, Hong Kong and so on.
	Dial Tone	Dial tone
	Busy Tone	Busy Tone
	Off Hook Warning Tone	Off hook warning tone
	Ring Back Tone	Ring back tone
	Call Waiting Tone	Call Waiting tone.
	Min Jitter Delay (ms)	The Min value of IP622's jitter delay, IP622's jitter is an adaptive jitter mechanism.
	Max Jitter Delay (ms)	The Max value of IP622's jitter delay, IP622's jitter is an adaptive jitter mechanism.
	Ringing Time(Sec)	How long IP622 will ring

7.7.1.3 Call Forward

Webpage	Field Name		Description
<div><div>Features</div><div><div>All Forward</div><div>Disable</div><div></div></div><div><div>Busy Forward</div><div>Disable</div><div></div></div><div><div>No Answer Forward</div><div>Disable</div><div></div></div></div> <div><div>Call Forward</div><div><div>All Forward</div><div></div></div><div><div>Busy Forward</div><div></div></div><div><div>No Answer Forward</div><div></div></div><div><div>No Answer Timeout</div><div>20</div></div></div> <div><div>Feature Code</div><div><div>Cfwd All On Code</div><div></div></div><div><div>Cfwd All Off Code</div><div></div></div><div><div>Cfwd Busy On Code</div><div></div></div><div><div>Cfwd Busy Off Code</div><div></div></div><div><div>Cfwd No Ans On Code</div><div></div></div><div><div>Cfwd No Ans Off Code</div><div></div></div><div><div>DND On Code</div><div></div></div><div><div>DND Off Code</div><div></div></div></div>	Features	All Forward	If or not enable all forward.
		Busy Forward	If or not enable busy forward.
		No Answer Forward	If or not enable no answer forward.
	Call Forward	All Forward	Fill in all forward number.
		Busy Forward	Fill in busy forward number.
		No Answer Forward	Fill in no answer forward.
		No Answer Timeout	Specify no answer timeout.
	Feature Code	Cfwd All On Code	Fill in cfwd all on code.
		Cfwd All Off Code	Fill in cfwd off on code.
		Cfwd Busy On Code	Fill in cfwd busy on code.
		Cfwd Busy Off Code	Fill in cfwd busy off on code.
		Cfws No Ans On Code	Fill in cfwd no answer on code.
Cfwd No Ans Off Code		Fill in cfwd no answer off code.	

		DND On Code	Fill in DND on code.
		DND Off Code	Fill in DND off code.

7.7.1.4 Miscellaneous

Webpage	Field Name	Description
	Auto Answer	If or not enable auto answer. If enable, IP622 will auto answer all incoming call immediately.
	Auto Answer by CallINFO	If or not enable auto answer by call info.
	Dial Time Out	How long IP622 to sound dial out tone when IP622 dialing number.
	Call Immediately Key	Choose call immediately key form * or #.
	Auto Hookon Mode	If or not enable auto hook on mode, if enable, IP622 will hang up automatically when the other side hangs up.
	ICMP Ping	If or not enable ICMP Ping. If enable this option, IP622 will ping the SIP Server every interval time, otherwise, It will send “hello” empty packet to the SIP Server.
	Escaped char enable	If or not enable escaped char.

7.7.2 Multi-Functional Key

- Step 1.Choose one **Exp Key** from the Exp Key 1...10.
- Step 2.Choose one **function type** from **speed dial**, **BLF**, **shortcut key**, **call pickup** and **call park**.
- Step 3.Set the other corresponding parameters.
- Step 4.Press **Save** button to save changes, press **Cancel** button to cancel changes.

Below is an example:

Key	Type	Mode	Line	Expansion	Pickup Code
Exp Key 1	Speed Dial ▾	▾	Auto ▾	111	
Exp Key 2	Speed Dial ▾	▾	Line 1 ▾	111	
Exp Key 3	Speed Dial ▾	▾	Line 2 ▾	111	
Exp Key 4	BLF ▾	▾	Line 1 ▾	111	*8
Exp Key 5	BLF ▾	▾	Line 2 ▾	111	*8
Exp Key 6	Shortcut Key ▾	Phonebook ▾	▾		
Exp Key 7	Shortcut Key ▾	Volume+ ▾	▾		
Exp Key 8	Shortcut Key ▾	Volume- ▾	▾		
Exp Key 9	Call Pickup ▾	▾	Line 1 ▾	111	
Exp Key 10	Call Park ▾	▾	Line 1 ▾	70	

Adding speed dial:

- Step 1.Choose one Exp Key to configuration
- Step 2.Select the speed dial from the drop down list
- Step 3.Choose the Line from auto (the first line registered), line1, line2
- Step 4.Fill the phone number in Expansion
- Step 5.Press Save to save changes and you can see the status of corresponding LED is solid green.
- Step 6.Press Reboot button to make changes effective.





If set properly, press the corresponding key to make call immediately, and the status of LED is solid red.



Adding BLF:

- Step 1.Choose one Exp Key to configuration
- Step 2.Select the BLF from the drop down list
- Step 3.Choose the Line from line1, line2.
- Step 4.Fill the monitored phone number in Expansion
- Step 5.Fill the pickup code in **Pickup Code** if user wants to pickup the call when there is a new call coming in monitored phone.
- Step 6.Press Save to save changes.
- Step 7.Press Reboot button to make changes effective.

Adding shortcut key:

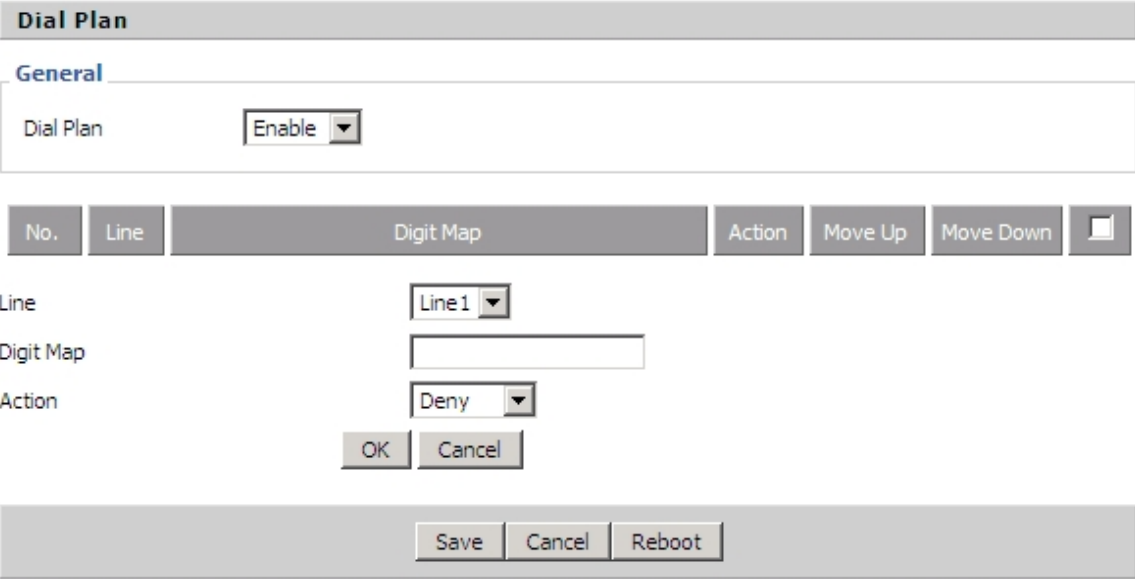
- Step 1.Choose one Exp Key to configuration
- Step 2.Select the shortcut key from the drop down list

	<p>Step 3.Select the mode from the phonebook, call history, text message, volume+, volume- and login/logout in the drop down list.</p> <p>Step 4.Press  to save changes and you can see the status of corresponding LED is solid green.</p> <p>Step 5.Press  button to make changes effective.</p> <p>If set properly, press the corresponding button to access to phonebook, call history, text message, volume+, volume- and login/logout menu directly.</p> <p>Adding Call Pickup:</p> <p>Step 1.Choose one Exp Key to configuration</p> <p>Step 2.Select the call pickup from the drop down list</p> <p>Step 3.Choose the Line from line1, line2.</p> <p>Step 4.Fill the phone number in Expansion</p> <p>Step 5.Press  to save changes and you can see the status of corresponding LED is solid green.</p> <p>Step 6.Press  button to make changes effective.</p> <p>In idle, press the corresponding button to make call immediately.</p> <p>Adding call park:</p> <p>Step 1.Choose one Exp Key to configuration</p> <p>Step 2.Select the Call Park from the drop down list in type</p> <p>Step 3.Choose the Line from line1, line2.</p>
--	---

	<p>Step 4.Fill the pickup extension code in Expansion</p> <p>Step 5.Press  to save changes and you can see the status of corresponding LED is solid green.</p> <p>Step 6.Press  button to make changes effective.</p>
--	---

7.7.3 Dial Plan

7.7.3.1 Parameters and Settings

Webpage	Field Name	Description
 <p>Picture 1</p>	Dial Plan	If or not enable dial plan.
	Line	Choose the call mode from line1, line2.
	Digit Map	Fill in the sequence used to match input number
		The syntactic, please refer to the following Dial Plan Syntactic
	Action	Choose the dial plan mode from Deny and Dial Out. Deny means IP622 will reject the matched number, while Dial Out means IP622 allow dial out the matched number.
	Move Up	Press it to move up.
	Move Down	Press it to move down.

Dial Plan

General

Dial Plan

Enable

No.	Line	Digit Map	Action	Move Up	Move Down	
1	Line1	<9: 010>2010110	Dial Out	⬆	⬇	<input type="checkbox"/>
2	Line2	<5,:><:24133>8101	Dial Out	⬆	⬇	<input type="checkbox"/>
3	Line1	<4-6]:>22x<:333>	Dial Out	⬆	⬇	<input type="checkbox"/>
4	Line2	<9,8,:>711	Dial Out	⬆	⬇	<input type="checkbox"/>
5	Line1	<[2-5],:5>622.	Deny	⬆	⬇	<input type="checkbox"/>

Line

Digit Map

Action

Line1

Deny

OKCancel

Picture 2

Steps :

Adding one dial plan:

- Step 1. Enable Dial Plan
- Step 2. Click **Add** button, and the configuration table like Picture 1 will appear
- Step 3. Fill in the value of parameters.
- Step 4.Press **OK** button to end configuration.
- Step 5. Press **Save Settings** button to save changes.

Editing one dial plan:

- Step 1. Enable Dial plan
- Step 2. Choose one dial plan
- Step 3. Click **Edit** button, and the configuration table like Picture 2 will appear
- Step 4. Change the value of parameters.
- Step 5.Press **OK** button to end configuration.
- Step 6. Press **Save Settings** button to save changes.

Deleting one dial plan:

- Step 1. Enable Dial plan
- Step 2. Choose one dial plan
- Step 3. Click **Delete** button to delete the dial plan

7.7.3.2 Dial Plan Syntactic

No.	String	Description
1	0 1 2 3 4 5 6 7 8 9 * #	Legal characters
2	X	Lowercase letter x stands for one legal character
3	[sequence]	To match one character form sequence. For example: <ul style="list-style-type: none">[0-9]: match one digit form 0 to 9[23-5*]: match one character from 2 or 3 or 4 or 5 or *
4	x.	Match to $x^0, x^1, x^2, x^3, \dots, x^n$ For example: “01.”: can match ”0”, “01”, “011”, ”0111”,, ”01111...”
5	<dialed: substituted>	Replace dialed with substituted. For example: <8:1650>123456: input is “85551212”, output is“16505551212”
6	x,y	Make outside dial tone after dialing “x”, stop until dialing character “y” For example: “9,1xxxxxxxxxx”:IP622 make outside dial tone after inputting “9”, stop tone until inputting “1” “9,8,010x”: make outside dial tone after inputting “9”, stop tone until inputting “0”
7	T	Set the delayed time. For example: “<9:111>T2”: IP622 will dial out the matched number “111” after 2 seconds.

7.7.3.3 Example

Dial Plan

General

Dial Plan

Enable

No.	Line	Digit Map		Action	Move Up	Move Down	
1	Line1	<:010>#12<#:%23>2	1	Dial Out	⬆	⬇	<input type="checkbox"/>
2	Line1	<5,:><:241333>8101	2	Dial Out	⬆	⬇	<input type="checkbox"/>
3	Line1	<[4-5]:>22xxxx<:333>	3	Dial Out	⬆	⬇	<input type="checkbox"/>
4	Line1	<2-3,:5>622.	4	Dial Out	⬆	⬇	<input type="checkbox"/>
5	Line1	777x.8	5	Deny	⬆	⬇	<input type="checkbox"/>

Edit

Add

Delete

Save

Cancel

Reboot

1. Example 1

Using line 1, if user dials **#12#2**, IP622 will call **010#12%232** immediately.

2. Example 2

Using line 2, if user dials **5,8101**, IP622 will call **2413338101** immediately,

And IP622 will make outside dial tone after inputting “5”, stop tone until inputting “8”.

3. Example 3

Using line 1, if user dials **422xxxx** or **522xxxx**, IP622 will call **22xxxx333** immediately.

4. Example 4

Using line 2, if user dials **2,622** or **2,6222** or **2,62222** or **2.622222** or **3.622222**, IP622 will call **5622** or **56222** or **562222** or **5622222** or **5622222** immediately.

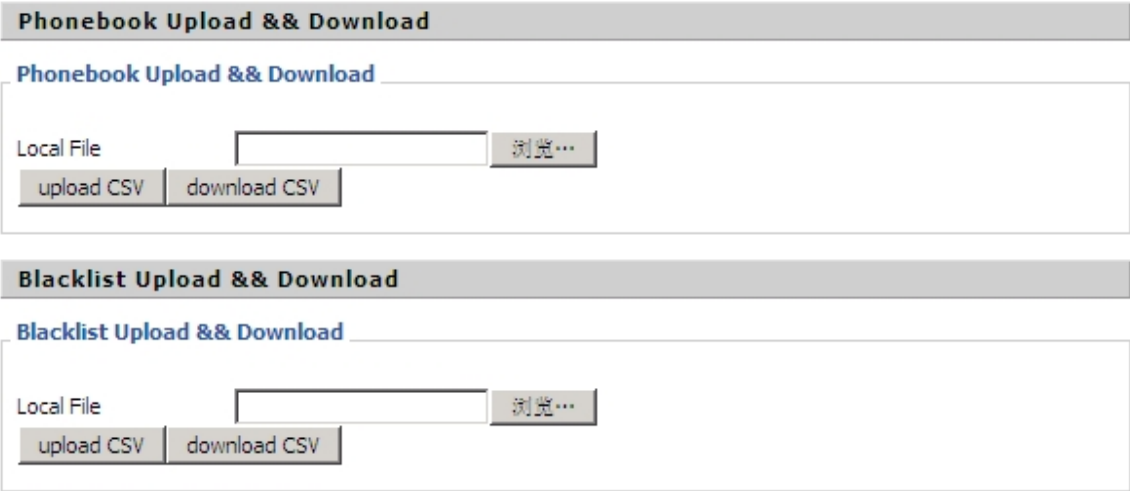






And IP622 will make outside dial tone after inputting “2” or “3”, stop tone until inputting “6”.

5. Example 5

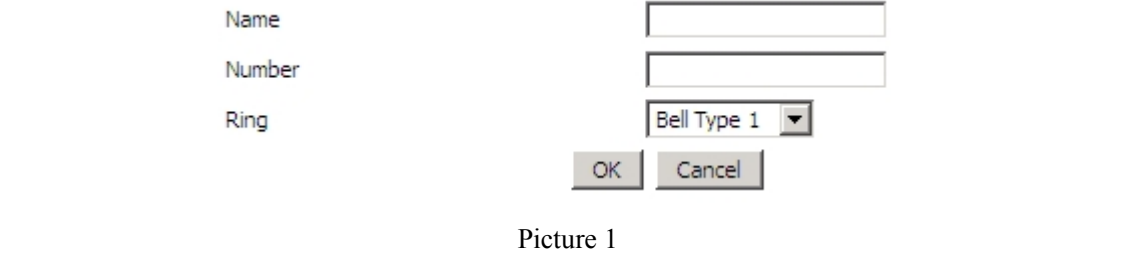
Using line 1, if user dials **777x8**, IP622 will reject the phone number out.

7.7.4 Phone Book

7.7.4.1 Upload &&Download Phonebook or Blacklist

Webpage	Field Name	Description
	Phonebook Upload&&Download	Click  to save the phonebook to the local PC.
		Click  to select the phonebook and click  to upload it to the phone.
	Blacklist Upload &&Download	Click  to save the blacklist to the local PC.
		Click  to select the blacklist and click  to upload it to the phone.

7.7.4.2 Phonebook

Webpage	Field Name	Description
	Name	Input the name.
	Number	Input the phone number.
	Ring	Select the ring tone type.

Phonebook

Index	Name	Number	Ring	
1	Hanmei	123	Bell Type 1	<input type="checkbox"/>
2	Lily	528	Bell Type 1	<input type="checkbox"/>
3	Tom	516	Bell Type 1	<input type="checkbox"/>
4	Lilei	517	Bell Type 1	<input type="checkbox"/>
5	Steve	529	Bell Type 1	<input type="checkbox"/>
6	Spring	510	Bell Type 1	<input type="checkbox"/>
7	Summer	501	Bell Type 1	<input type="checkbox"/>
8	Winter	515	Bell Type 1	<input type="checkbox"/>
9	Hary	504	Bell Type 1	<input checked="" type="checkbox"/>

Edit

Add

Delete

Move to blacklist

Picture 2

Name

Tom

Number

516

Ring

Bell Type 1

OK

Cancel

Picture 3

Index	Name	Number	Ring	
1	Hanmei	123	Bell Type 1	<input type="checkbox"/>
2	Lily	528	Bell Type 1	<input type="checkbox"/>
3	Tom	516	Bell Type 1	<input type="checkbox"/>
4	Lilei	517	Bell Type 1	<input type="checkbox"/>
5	Steve	529	Bell Type 1	<input type="checkbox"/>
6	Spring	510	Bell Type 1	<input type="checkbox"/>
7	Summer	501	Bell Type 1	<input type="checkbox"/>
8	Winter	515	Bell Type 1	<input type="checkbox"/>
9	Hary	504	Bell Type 1	<input checked="" type="checkbox"/>

Edit

Add

Delete

Move to blacklist

Picture 4

Steps :

Adding one phone book:

- Step 1. Click **Add** button, and the configuration table like Picture 1 will appear
- Step 2. Fill in the value of parameters.
- Step 3. Press **OK** button to end configuration.
- Step 4. Press **Save** button to save changes.

Editing one phone book:

- Step 1. Choose one phone book
- Step 2. Click **Edit** button, and the configuration table like Picture 3 will appear.
- Step 3. Change the value of parameters.
- Step 4. Press **OK** button to end configuration.
- Step 5. Press **Save** button to save changes.

Deleting one phone book:

- Step 1. Choose one phone book
- Step 2. Click **Delete** button to delete the phone book

Move one phone book to Black list:

- Step 1. Choose one phone book

	<p>Step 2. Click Move to blacklist button to delete the phone book</p>
--	---

7.7.4.3 Black List

Webpage	Field Name	Description																
<div><div><div>Name</div><div>Number</div><div><div>OK</div><div>Cancel</div></div></div><div>Picture 1</div></div>	Name	Input the name																
	Number	Input the phone number																
<div><div><div><div>Blacklist</div></div><table><tr><th>Index</th><th>Name</th><th>Number</th><th></th></tr><tr><td>1</td><td>de</td><td>23</td><td><input type="checkbox"/></td></tr><tr><td>2</td><td>fg</td><td>56</td><td><input type="checkbox"/></td></tr><tr><td>3</td><td>hj</td><td>63</td><td><input checked="" type="checkbox"/></td></tr></table><div><div><div>Name</div><div>Number</div><div><div>OK</div><div>Cancel</div></div></div><div>Picture 2</div></div></div></div>	Index	Name	Number		1	de	23	<input type="checkbox"/>	2	fg	56	<input type="checkbox"/>	3	hj	63	<input checked="" type="checkbox"/>	<div><div>Steps :</div><div><div>Adding one Black List:</div><div>Step 1. Click Add button, then the configuration table like Picture 1 will appear</div><div>Step 2. Fill in the value of parameters.</div><div>Step 3. Press OK button to end configuration.</div><div>Step 4. Press Save button to save changes.</div><div>Editing one Black List:</div><div>Step 1. Choose one black list</div><div>Step 2. Click Edit button, and the configuration table like Picture 2 will appear</div><div>Step 3. Change the value of parameters.</div><div>Step 4. Press OK button to end configuration.</div><div>Step 5. Press Save Settings button to save changes.</div><div>Deleting one Black List:</div><div>Step 1. Choose one black list</div><div>Step 2. Click Delete button to delete the black list</div><div>Moving one Black List to phonebook:</div><div>Step 1. Choose one black list</div><div>Step 2. Click <div>Move to phonebook</div> button to move the black list to the phonebook</div></div></div>	
Index	Name	Number																
1	de	23	<input type="checkbox"/>															
2	fg	56	<input type="checkbox"/>															
3	hj	63	<input checked="" type="checkbox"/>															

7.7.5 Call Log

To view the call log information such as redial list (incoming call), answered call and missed call.

7.7.5.1 Redial List

Redial List				
Index	Name	Number	Start Time	Duration
1	111	111	04/19 10:51	00:00:01
2	6526	6526	04/18 12:14	00:00:04
3	6	6	04/18 12:14	00:00:00
4	6527	6527	01/01 00:03	00:00:04
5	6526	6526	04/18 12:07	00:00:05
6	6526	6526	01/01 00:03	00:00:05
7	6526	6526	04/18 12:01	00:00:06
8	111	111	04/18 12:01	00:00:01
9	6526	6526	04/18 12:00	00:00:01
10	6	6	04/18 12:00	00:00:01
11	6526	6526	04/18 12:00	00:00:01
12	6526	6526	04/18 12:00	00:00:01
13	010	010	04/18 11:01	00:00:02

7.7.5.2 Answered Calls

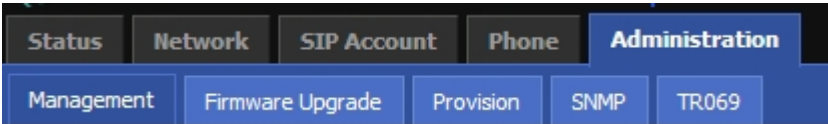
Answered Calls				
Index	Name	Number	Start Time	Duration
1	222	222	04/19 12:29	00:00:18
2	111	111	04/19 12:20	00:00:39
3	222	222	04/19 12:19	00:00:12
4	222	222	04/19 12:17	00:00:08
5	111	111	04/19 11:55	00:04:00
6	111	111	04/19 11:52	00:02:59
7	111	111	04/19 11:11	00:01:01
8	111	111	04/19 10:52	00:00:18
9	111	111	04/19 10:52	00:00:05
10	111	111	04/19 10:51	00:00:20
11	6526	6526	04/18 12:14	00:00:04
12	6526	6526	04/18 12:07	00:00:06
13	6526	6526	04/18 12:00	00:00:06

7.7.5.3 Missed Call

Missed Calls				
Index	Name	Number	Start Time	Duration
1	456	456	03/25 19:06	00:00:01
2	456	456	03/25 19:06	00:00:00
3	456	456	03/25 19:05	00:00:01
4	456	456	03/25 19:05	00:00:01
5	456	456	03/25 19:05	00:00:01

7.8 Administration

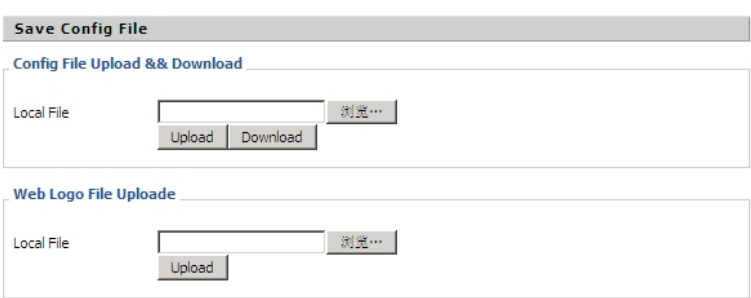
Use can manage the IP622 in these six webpages; you can configure the Time/Date, password, web access, system log and so on.



7.8.1 Management

You can configuration the value of Time/Date, password, web access, and system log and so on.

7.8.1.1 File Upload&&Download

Webpage	Field Name	Description
	Config File Upload&& Download	Upload or Download the configuration file.
	Web Logo File Upload	Upload the web log file.

7.8.1.2 Administrator Settings

Webpage	Field Name	Description
<div><div><div><div>Password Reset</div><div><div>User Type</div><div>Admin User</div></div><div><div>New User Name</div><div>admin</div></div><div><div>New Password</div><div></div></div><div><div>Confirm Password</div><div></div></div></div></div><div><div><div>Language</div><div>English</div></div></div><div><div><div>Web Access</div><div><div>Remote Web Login</div><div>Enable</div></div><div><div>Web Port</div><div>80</div></div><div><div>Web Idle Timeout(0 - 60m)</div><div>5</div></div></div></div></div>	User Type	Select Admin User or Normal User.
	New User Name	Input the user name.
	New Password	Input the password.
	Confirm Password	Input the password again.
	Language	User can select the language, options are English,Russian, Finnish, Spanish,Czech, Hebrew and Romania.
	Remote Web Login	If or not enable remote web login.
	Web Port	Set the port which used to login WEB via Internet port and PC port, default is 80.
	Web Idle Timeout(0-60m)	Set web idle time out, measured by minute, The web page can be logged out after Web Idle Timeout without any operation.

7.8.1.3 Time/Date

Webpage	Field Name	Description
<div><div>Time/Date Setting</div><div><div>NTP Settings</div><div><div>NTP Enable</div><div>Enable</div></div><div><div>Current Time</div><div>Sat Jun 8 13:58:36 GMT 2013</div><div>Sync with host</div></div><div><div>NTP Settings</div><div>(GMT+08:00) China Coast, Hong Kong</div></div><div><div>Primary NTP Server</div><div>pool.ntp.org</div></div><div><div>Secondary NTP Server</div><div>cn.pool.ntp.org</div></div><div><div>NTP synchronization(1 - 1440m)</div><div>60</div></div></div><div><div>Daylight Saving Time</div><div><div>Daylight Saving Time</div><div>Enable</div></div><div><div>Offset</div><div>60</div><div>Min.</div></div><div><div>Start Month</div><div>April</div></div><div><div>Start Day of Week</div><div>Sunday</div></div><div><div>Start Day of Week Last in Month</div><div>First in Month</div></div><div><div>Start Hour of Day</div><div>2</div></div><div><div>Stop Month</div><div>October</div></div><div><div>Stop Day of Week</div><div>Sunday</div></div><div><div>Stop Day of Week Last in Month</div><div>Last in Month</div></div><div><div>Stop Hour of Day</div><div>2</div></div></div></div>	NTP Enable	If or not enable NTP.
	Current Time	Display the current Time.
	NTP Settings	Select the time zone.
	Primary NTP Server	Enter the domain of primary NTP server.
	Secondary NTP Server	Enter the domain of secondary NTP server.
	NTP synchronization (1-1440m)	The synchronization period.
	Daylight Saving Time	If or not enable daylight saving time.
	Offset	Offset time, “-60” means advancing 60minute, “60” means delaying 60miute.
	Start Month	Choose starting month
	Start Day of Week	Choose starting day
Start Day of Week Last in Month	Choose starting week	

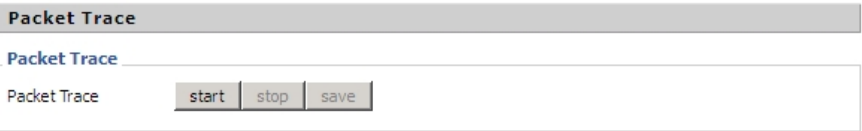
	Start Hour of Day	Choose starting hour
	Stop Month	Choose stopping month
	Stop Day of Week	Choose stopping day
	Stop Day of Week Last in Month	Choose stopping week
	Stop Hour of Day	Choose stopping the function hour
<div> <div>Daylight Saving Time</div> <div>Enable</div> </div> <div> <div>Offset</div> <div>60</div> <div>Min.</div> </div> <div> <div>Start Month</div> <div>March</div> </div> <div> <div>Start Day of Week</div> <div>Sunday</div> </div> <div> <div>Start Day of Week Last in Month</div> <div>Last in Month</div> </div> <div> <div>Start Hour of Day</div> <div>2</div> </div> <div> <div>Stop Month</div> <div>October</div> </div> <div> <div>Stop Day of Week</div> <div>Sunday</div> </div> <div> <div>Stop Day of Week Last in Month</div> <div>Last in Month</div> </div> <div> <div>Stop Hour of Day</div> <div>3</div> </div>		
<div>Steps:</div> <div>Daylight Saving Time:</div> <div>Step 1. Enable Daylight Saving Time.</div> <div>Step 2. Set value of offset, like Picture 2</div> <div>Step 3: Set staring Month/Week/Day/Hour in Start Month/Start Day of Week Last in Month/Start Day of Week/Start Hour of Day, analogously set stopping Month/Week/Day/Hour in Stop Month/Stop Day of Week Last in Month/Stop Day of Week/Stop Hour of Day.</div> <div>Step 5.Press Saving button to save and press Reboot button to active changes.</div>		

7.8.1.4 System Log Setting


Webpage	Field Name	Description
<div> <div>System Log Setting</div> <div> <div>Syslog Setting</div> <div> <div>Syslog Enable</div> <div>Enable</div> </div> <div> <div>Syslog Level</div> <div>INFO</div> </div> <div> <div>Remote Syslog Enable</div> <div>Disable</div> </div> <div> <div>Remote Syslog Server</div> <div></div> </div> </div> </div>	SysLog Enable	If or not enable system log.
	Syslog Level	Choose log level from INFO and Debug. Debug provides more system log information than INFO.
	Remote Syslog Enable	If or not enable remote system log,
	Remote Syslog Server	Fill in remote system log server address.

7.8.1.5 Packet Trace

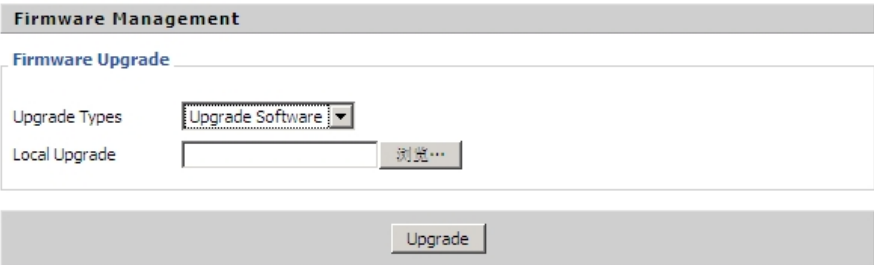


Webpage	Field Name	Description
---------	------------	-------------

 The screenshot shows a web interface with a header 'Packet Trace' in a grey bar. Below it, there's a sub-header 'Packet Trace' in blue. Underneath, the text 'Packet Trace' is followed by three buttons: 'start', 'stop', and 'save'.	User can use this function to trace the packets sent by the phone. Press start to begin packet trace, and refresh the webpage until it displays stop , press save to save the packet to your local PC.
--	---

7.8.1.6 Factory Defaults

Webpage	Field Name	Description
 The screenshot shows a web interface with a header 'Factory Defaults' in a grey bar. Below it, the text 'Reset to Factory Default' is followed by a button labeled 'Factory Default'.		Press Factory Default button to reset IP622 default.

7.8.2 Firmware Upgrade

Webpage	Description
 The screenshot shows a web interface with a header 'Firmware Management' in a grey bar. Below it, there's a sub-header 'Firmware Upgrade' in blue. Underneath, there's a section 'Upgrade Types' with a dropdown menu set to 'Upgrade Software'. Below that, there's a 'Local Upgrade' section with a text input field and a '浏览...' button. At the bottom, there's a large grey bar with an 'Upgrade' button.	<p>Steps:</p> <p>Step 1. Press  to browser the upgrade file.</p> <p>Step 2. Press  to start upgrading, LCD will display the notice when upgrading.</p> <p>Step 3. Login web and then check the firmware whether well upgraded by viewing the firmware version in Status/Basic webpage.</p>

7.8.3 Provision

- 1) Provisioning allow IP622 auto-upgrading or auto-configuring
- 2) IP622 supports 3 ways to provision: TFTP, HTTP and HTTPS.

◆ Before testing or using TFTP, user should have tftp server and upgrading file and configuring file.

◆ Before testing or using HTTP, user should have http server and upgrading file and configuring file.

◆ Before testing or using HTTPS, user should have https server and upgrading file and configuring file and CA Certificate file(should same as https server’s) and Client Certificate file and Private key file

- 3) User can uploading CA Certificate file and Client Certificate file and Private Key file in Equipment Manage/Cert Manage page.
- 4) Details please refer to document Provision_User Manual_en_v1.1.doc

Webpage	Field Name	Description
<div><div>Provision</div><div><div>Configuration Profile</div><div><div>Provision Enable</div><div>Enable</div></div><div><div>Resync On Reset</div><div>Enable</div></div><div><div>Resync Random Delay(sec)</div><div>40</div></div><div><div>Resync Periodic(sec)</div><div>3600</div></div><div><div>Resync Error Retry Delay(sec)</div><div>3600</div></div><div><div>Forced Resync Delay(sec)</div><div>14400</div></div><div><div>Resync After Upgrade</div><div>Enable</div></div><div><div>Option 66</div><div>Enable</div></div><div><div>Config File Name</div><div>\$(MA)</div></div><div><div>Profile Rule</div><div></div></div></div></div> <div><div>Firmware Upgrade</div><div><div>Upgrade Enable</div><div>Enable</div></div><div><div>Upgrade Error Retry Delay(sec)</div><div>3600</div></div><div><div>Upgrade Rule</div><div></div></div></div> <div><div>Save</div><div>Cancel</div><div>Reboot</div></div>	Provision Enable	If or not enable provision.
	Resync On Reset	If or not enable resync after IP622 restart.
	Resync Random Delay	Set the maximum delay for request the synchronization file.
	Resync Periodic(sec)	Set the periodic time for resync, default is 3600s
	Resync Error Retry Delay	If the last resync was failure, IP622 will retry resync after the “Resync Error Retry Delay” time, default is 3600s
	Forced Resync Delay	If it’s time to resync, but IP622 is busying now, in this case, IP622 will wait for a period time, the longest is “Forced Resync Delay” , default is 14400s, when the time over, IP622 will forced to resync
	Resync After Upgrade	If or not enable firmware upgrade after resync.
	Option 66	If or not enable option 66, default is enable.
	Config File Name	Fill in the name of configuration file which phone will download from the Option 66 server.
	Profile Rule	URL of profile provision file
	Upgrade Enable	If or not enable firmware upgrade.
	Upgrade Error Retry Delay	Set the time to retry upgrade, effective when the last upgrade was failure
	Upgrade Rule	URL of upgrade file

7.8.4 SNMP

Webpage	Field Name	Description
	SNMP Enable	If or not enable SNMP
	Trap Server	Enter the trap server address.

<div><div>SNMP Configuration</div><div><div>SNMP Configuration</div><div><div>SNMP Service</div><div>Disable ▾</div></div><div><div>Trap Server Address</div><div></div></div><div><div>Read Community Name</div><div>public</div></div><div><div>Write Community Name</div><div>private</div></div><div><div>Trap Community</div><div>trap</div></div><div><div>Trap period interval(sec)</div><div>300</div></div></div><div><div>Save</div><div>Cancel</div><div>Reboot</div></div></div>	address	
	Read Community Name	String, as an express password between management process and the agent process
	Write Community Name	String, as an express password between management process and the agent process
	Trap Community	The community field in trap.
	Trap period interval(sec)	The interval of sending trap.

7.8.5 TR069

Webpage	Field Name	Description
<div><div>TR069 Configuration</div><div><div>ACS</div><div><div>TR069 Enable</div><div>Disable ▾</div></div><div><div>CWMP</div><div>Enable ▾</div></div><div><div>ACS URL</div><div></div></div><div><div>User Name</div><div></div></div><div><div>Password</div><div></div></div><div><div>Periodic Inform Enable</div><div>Enable ▾</div></div><div><div>Periodic Inform Interval</div><div>30</div></div></div><div><div>Connect Request</div><div><div>User Name</div><div></div></div><div><div>Password</div><div></div></div><div><div>SSL Key</div><div></div></div></div></div>	TR069 Enable	If or not enable TR069
	CWMP	If or not enable TR069
	ACS URL	The URL of TR069 server
	User Name	The IP622's user name for connecting to TR069 server
	Password	The IP622's password for connecting to TR069 server
	Periodic Inform Enable	If or not enable periodic information
	Periodic Inform Interval	The interval to send information to TR069 server
	User Name	The TR069 server's user name for connecting to IP622
	Password	The TR069 server's password for connecting to IP622
	SSL Key	Fill in SSL key.

8 Trouble Shooting

This section provides solutions to problems that can occur during the installation and operation of the IP phone. Read the following descriptions if you are having problems.

8.1 No Operation after Power On

Solution:

Check if the power adapter is properly connected.

If applicable, check if the PoE (Power over Ethernet) switch behind the IP phone is set correctly.

8.2 Long Time Stop at “Initializing Network”

Solution:

Check if the Ethernet cable is properly connected.

Check if the DHCP server is working normally.

Check if the connection between the DHCP Server and IP622 is properly connected.

8.3 No Dial Tone

Solution:

Check if the handset cord is properly connected.

8.4 Can not Make a Call

Solution:

Check the status of your SIP registration status or contact your administrator, supplier, or ITSP for more information or assistance.

8.5 Can not Receive Any Phone Call

Solution:

Check the status of your SIP registration status, or contact your administrator, supplier, or ITSP for more information or assistance.

8.6 No Voice during an Active Call

Solution:

Check if the servers support the current audio codec type, or contact your administrator, supplier, or ITSP for more information or assistance.

Audio Configuration

Codec Setup

Audio Codec Type 1:

G.711A

Audio Codec Type 2:

G.711A

Audio Codec Type 3:

G.711A

Audio Codec Type 4:

G.711A

Audio Codec Type 5:

G.711A

G.723 Coding Speed:

5.3k bps

Packet Cycle(ms):

20ms

Silence Supp Enable:

Disable

Echo Cancel:

Enable

8.7 Can not connect to the configuration Website

Solution:

Check if the Ethernet cable is properly connected.

Check if the URL is right wrote, the format of URL is: **http:// the Internet port IP address**.

Check if your firewall/NAT settings are correct.

Check if the version of IE is IE8, or use other browser such as Firefox or Mozilla, or contact your administrator, supplier, or ITSP for more information or assistance.

8.8 Forget the Password

Default password of website and menu is admin.

If user changed the password and then forgot, you can not access to the configuration website or the menu items which need password.

Solution:

Factory default: press **Menu** button and choose **16Factory Default**, then a notice will appear, choose **OK** by using the corresponding softkey

button. And this way is required password,too.

There is another way to make factory default, press **#*06#** on the phone's panel, and then select **4 Factory Reset**, input **YES(937)** to confirm your action, and then the phone will reset all the settings.

If you choose factory default, you will return the phone to the original factory settings and will erase ALL current settings, including the directory and call logs.

9 Contact ways

Sales: sales@flyingvoice.com

Support: support@flyingvoice.com

MSN: e3call@hotmail.com

Skype: [flyingvoice_sales](https://www.skype.com/people/flyingvoice_sales)

Shenzhen

Add: Room7007, Tiansha Building, MajiaLong, Industrial area, NanShan district, Shenzhen, China

Tel: +86-755-26099365

Fax: +86-755-26099347

Beijing

Add: Room415, ChuangXin Building A#, NO.12 HongDa North Rd, BDA, Beijing, China

Tel: +86-10-67886296

Fax: +86-10-67883237